


Z1172-174

SPECIFICATION SHEET

LARGE CAPACITY GREASE INTERCEPTOR WITH 4 [102] INLET AND OUTLET

TAG	

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

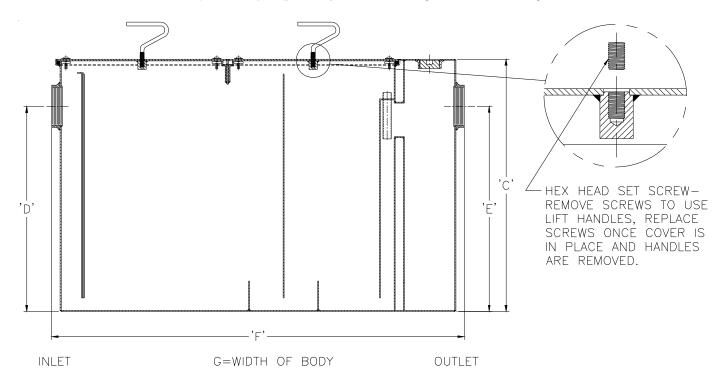

	Inlet/ Flo	Flow Rate	ow Rate Capa			Approx.	Dimensions in Inches			
Size	Outlet	G.P.M.	Water	Grease	of ver	Wt. Lbs.				
	Size	[L]	Gal. [L]	Lbs. [kg]	ှိ ပိ	[kg]	С	D/E	F	G
900	4 [102]	75 [284]	65 [246]	150 [68]	1	316 [143]	22-3/4 [578]	18-1/2 [470]	36 [914]	28-5/8 [719]
1000	4 [102]	100 [379]	110 [416]	200 [91]	1	408 [185]	27 [686]	23 [584]	42-3/4 [1086]	33-5/8 [846]
1100	4 [102]	125 [473]	150 [568]	250 [113]	2	749 [340]	30-1/8 [765]	24-1/2 [622]	49-1/4 [1251]	40[1016]

ENGINEERING SPECIFICATION: ZURN Z1172-174

Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at ____ GPM and ____ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug (which can be used as a sampling port) and visible double wall trap seal with removable pressure equalizing/ flow diffusing baffle. Gasketed non-skid secured cover with removable lift handles, complete with flow control fitting. Regularly furnished with inlet and outlet in high position.

OPTIONS (C	Check/specify appropriate options)
PREFIXES Z ZS	Acid Resistant Coated Fabricated Steel* All Type 304 Fabricated Stainless Steel
SUFFIXES	
AL	Aluminum Cover
E	Acid Resistant Coated Interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
HD	Heavy duty traffic cover rated at 10,000 lbs. [4536 kg] maximum safe live load. An increase 'C' dim. is required when -HD option is specified. (See -HD option specification sheet)
K	Anchor flange 1-3/4 [44] down from top and 2 [51] wide. (A 3 [76] minimum Extension Height is required when Anchor Flange (-K) Option is specified.)
KC	Anchor flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar. (A 3 [76] minimum Extension Height is required when Anchor Flange (-KC) Option is specified.)
L	Angle type (Z1108-L) flow control device.
PW	Plug Wrench
RE	Recessing receiver enclosed type for recessed installation. Furnished with gasketed non-skid cover with removable lift handles.
* Pegularly	furnished unless otherwise specified

Zurn Industries, LLC | Specification Drainage Operation

1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929 In Canada I Zurn Industries Limited

3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292

Rev. В Date: 07/30/15 C.N. No. 132955

Prod. | Dwg. No. Z1172-174