



# Z1810-12B-81

## 12 [305] DIAMETER ROUND INDUSTRIAL FLOOR DRAIN WITH ADJUSTABILITY, MEDIUM-DUTY PERFORATED GRATE, & THREADED OUTLET

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

**Engineering Specification:** ZURN Z1810-12B-81  
 12" [305mm] Diameter, 18 gage, all type 304 (CF8) stainless steel round industrial floor drain with medium-duty perforated grate, adjustable reinforced top frame with o-ring seal and securing clamp, perforated removable sediment bucket with lift handle, pre-sloped bottom sump, and pre-pour stabilizing anchor tabs.

Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm <sup>2</sup> ]
18 [8]	27.6 [178.2]

**Options** (Check/specify appropriate options)



**Pipe Size (ØA)** (Specify size/type) **Outlet**  
 3,4,6 [76,102,152] \_\_\_\_\_ IP Threaded NPT

**Prefixes**

- \_\_\_ Z Type 304 (CF8) Stainless Steel\*
- \_\_\_ ZM Type 316 (CF8M) Stainless Steel

**Suffixes**

- \_\_\_ -B Bell Trap/Solid Sediment Bucket
- \_\_\_ -KC Anchor Flange w/Seepage Holes and Clamp Collar
- \_\_\_ -P ø1/2 [13] Trap Primer Connection
- \_\_\_ -SA Stabilizer Assembly (Z1036)  
3 [76] and 4 [102] outlets only
- \_\_\_ -TS Top Secured Grate
- \_\_\_ -VH Vacuum Handle (-GCX Cover Only)  $1\frac{13}{16}$  [46] Min.
- \_\_\_ -3PT 3 [76] Stainless Steel P-Trap
- \_\_\_ -4PT 4 [102] Stainless Steel P-Trap
- \_\_\_ -6PT 6 [152] Stainless Steel P-Trap

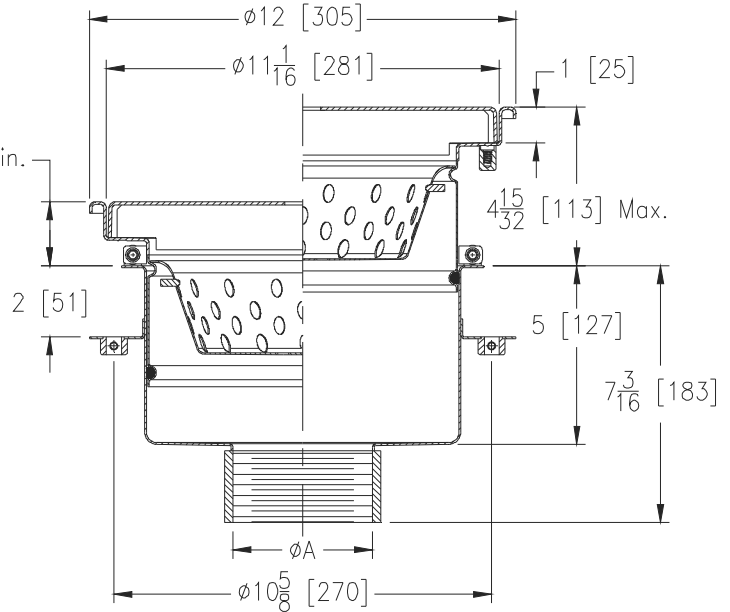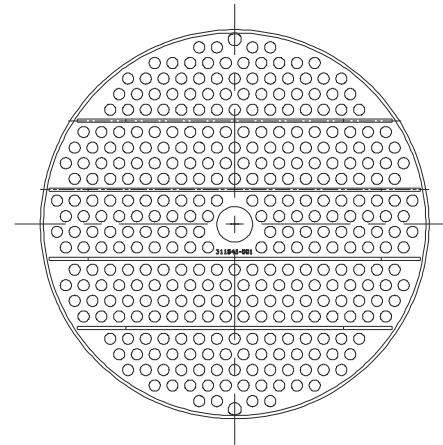

\* Regularly furnished unless otherwise specified.