




Z1188-123 OIL INTERCEPTOR

SPECIFICATION SHEET



TAG _____

Dimensional Data (inches or [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

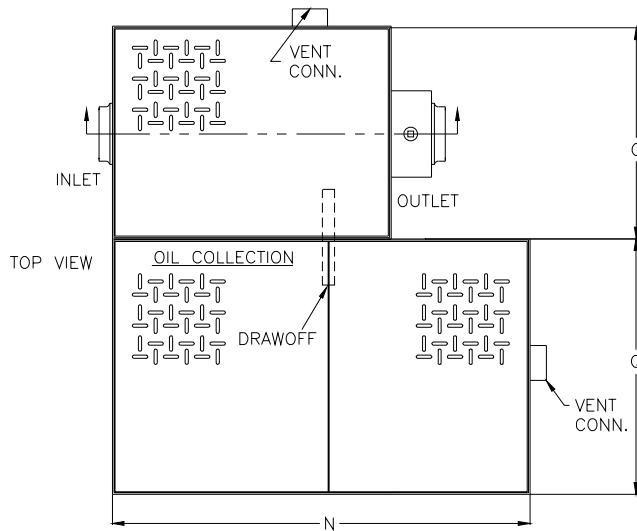

FlowRate GPM[L]Min.	Oil Storage Tank Cap. Gal.[L]	No. of Covers	
		Trap	Tank
200 [757]	300 [1136]	1	2

R = DEPTH OF STORAGE TANK
G = WIDTH OF BODY

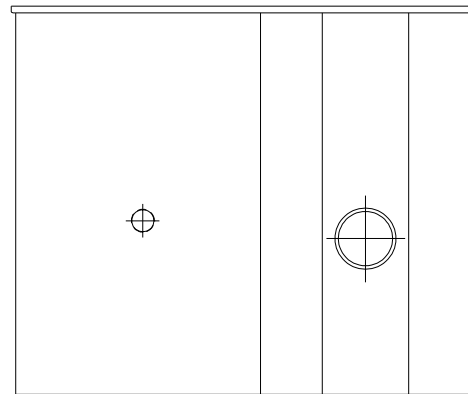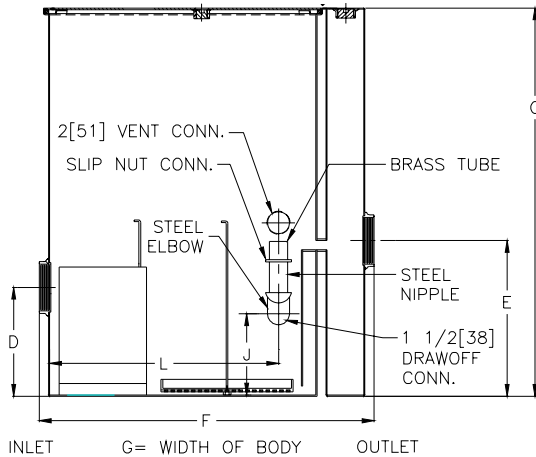

SIDE VIEW

FlowRate GPM[L]	Inlet/ Outlet Size**	Water Capacity Gal. [L]	App. Wt. Lbs. [Kg]	Dimensions In Inches									
				C	D	E	F	G	J	L	N	Q	R
200[757]	6 [152]	265 [1003]	1055 [479]	70 1/8 [1787]	23 7/8 [606]	29 7/8 [759]	61 [1594]	43 5/8 [1108]	18 [457]	46 5/8 [1184]	78 [1981]	57 1/2 [1461]	70 1/8 [1781]

ENGINEERING SPECIFICATION: ZURN Z1188-123 Large capacity Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with integral extension, bronze cleanout plug, visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil drawoff and vent connections. Secured gasketed non-skid cover complete with flow control fitting and vented integral storage tank. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

_____ Z Acid Resistant Coated Fabricated Steel*

REV.	DATE: 2/13/04	C.N. NO. 91945
DWG. NO. P-15032	PRODUCT NO. Z1188-123	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED