




# Z1187-SI-75 SAND INTERCEPTOR

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

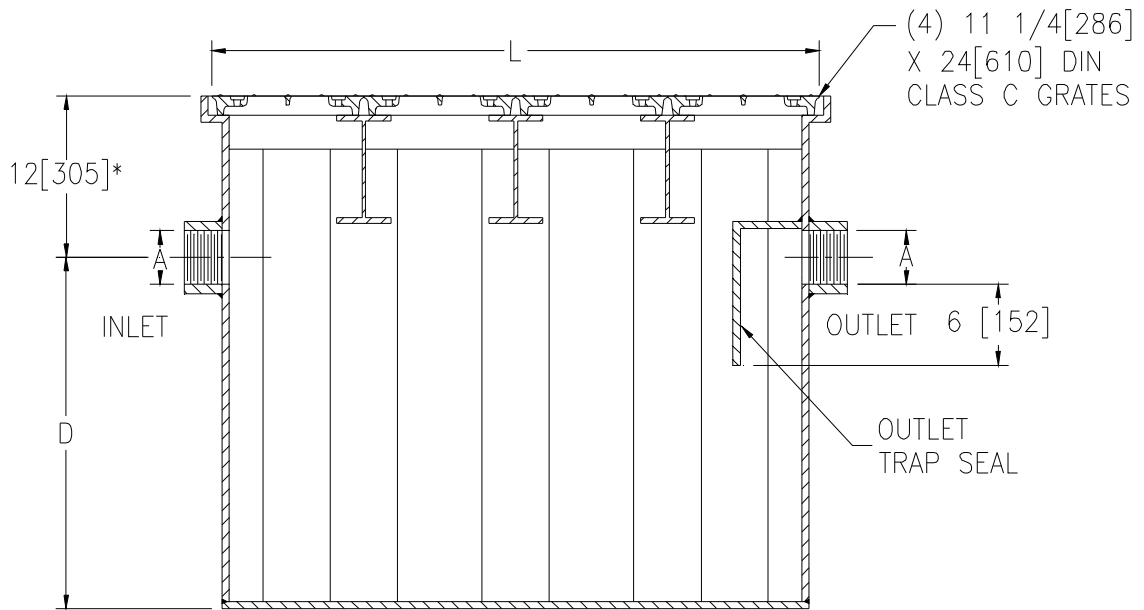

\*12[305] REGULARLY FURNISHED—  
SPECIFY DIMENSION IF HIGHER  
OR LOWER IS REQUIRED

Size	Flow G.P.M. [L] (Max.)	A Pipe Size	L	D	Capacity Gal. [L] (Static)	No. of 11 1/4 x 24 [288 x 610] Grates	Width
50	50 [189]	4 [102]	45 [1143]	26 [660]	120 [454]	4	24 [610]

**ENGINEERING SPECIFICATION:** ZURN Z1187-SI-75 Acid Resistant Coated interior and exterior fabricated steel sand interceptor with threaded inlet and outlet, complete with removable heavy duty grates.

**OPTIONS** (Check/specify appropriate options)

**PREFIXES**

\_\_\_ Z Acid Resistant Coated Fabricated Steel\*

**SUFFIXES**

- \_\_\_ -E 6[152] Integral extension assembly for recessed installation
- \_\_\_ -NH No-Hub Inlet and Outlet (Specify Size)
- \_\_\_ -VP Vandal Proof Screws

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 12/12/02	C.N. NO. 90115
DWG. NO. P-14951 PRODUCT NO. Z1187-SI-75		