


Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

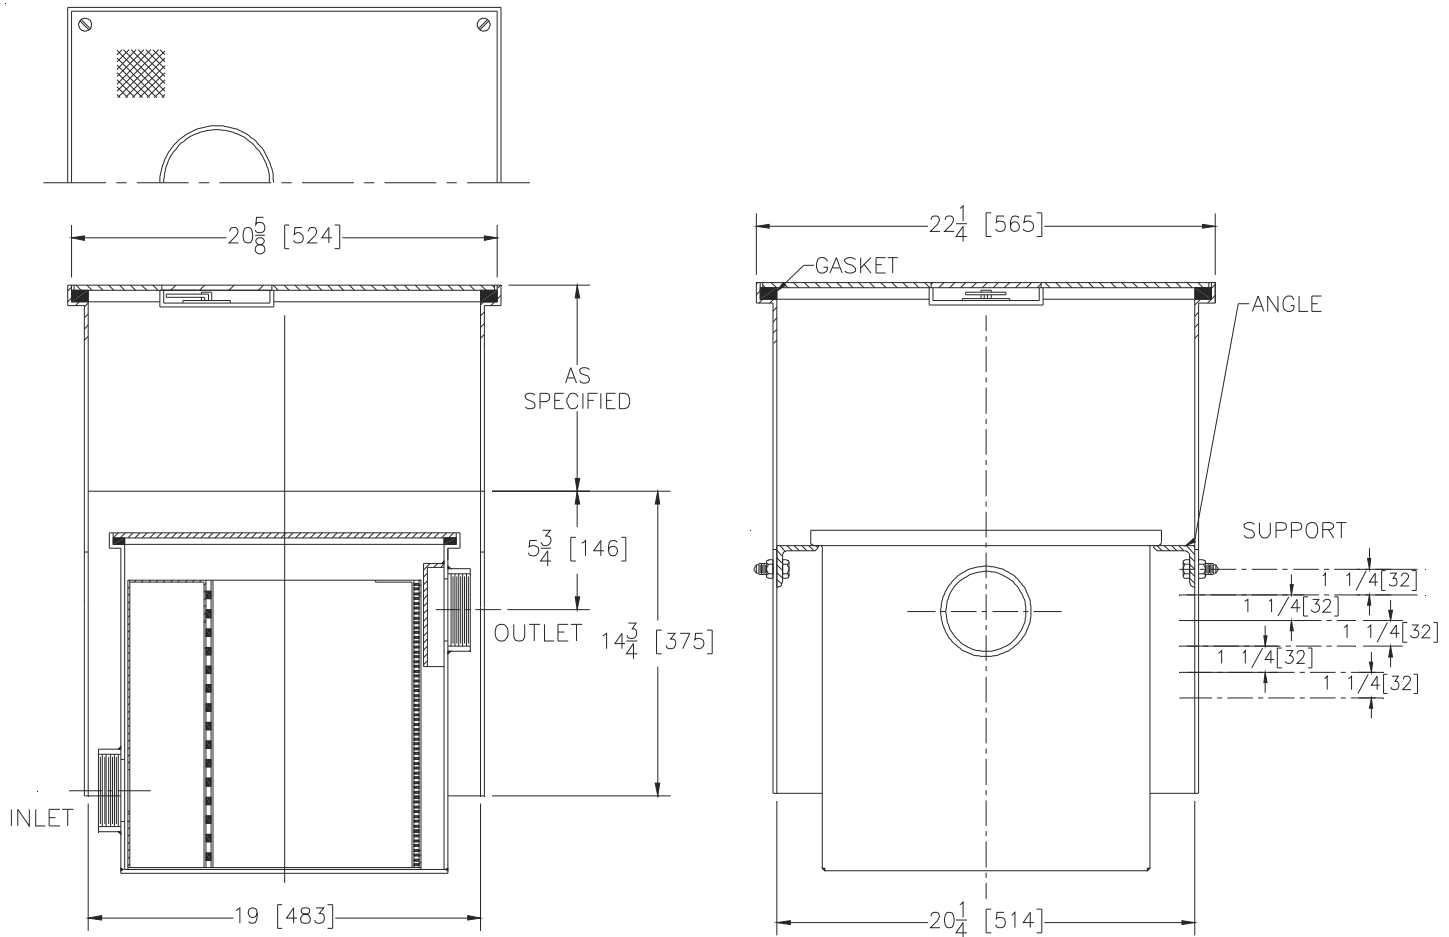

### ENGINEERING SPECIFICATION: ZURN Z1181-E-R

Acid Resistant Epoxy Coated Recessing receiver with integral extension equipped with adjustable support brackets and gasketed non-skid cover with recessed and covered lift handle. Complete with Z1181 solids interceptor for solids interceptor specifications see Z 1181 drawing.

### OPTIONS (Check/specify appropriate options)

#### PREFIXES

\_\_\_Z Acid Resistant Coated Fabricated Steel\*

#### SUFFIXES

- \_\_\_-K Anchor Flange 1-3/4 [44] down from top and 2 [52] wide. A 3 [72] minimum extension height is required when Anchor Flange (-K) option is specified. (Specify 'C' Dim. height required.)
- \_\_\_-KC Anchor Flange 1-3/4 [44] down from top and 2 [52] wide with clamp collar. A 3 [72] minimum extension height is required when Anchor Flange (-K) option is specified. (Specify 'C' Dim. height required.)
- \_\_\_-T Cover recessed for tile/terrazzo. A 3 [72] minimum extension height is required. (Specify 'C' Dim and required recess depth -1/8 [3], 3/4 [19], or 1-1/4 [32].)

\* Regularly furnished unless otherwise specified.