
ADJUSTABLE VERTICAL BACK TO BACK BLOWOUT NO-HUB WITH SIDE INLETS

Z1204-2ND4-B

TAG

SPECIFICATION SHEET

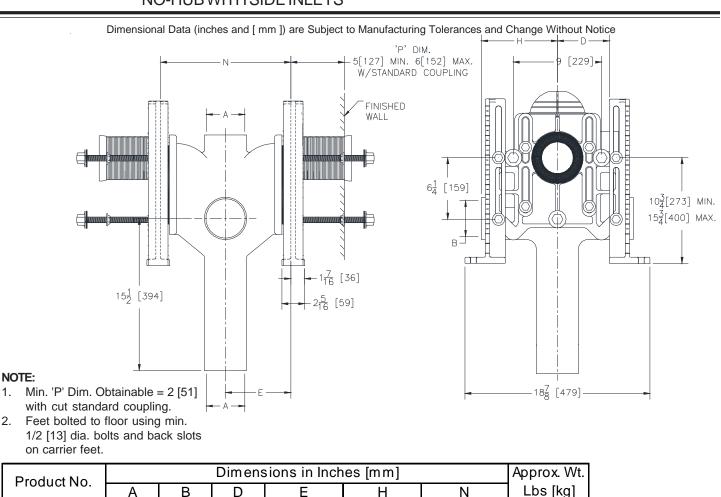

ENGINEERING SPECIFICATION: ZURN Z1204-2ND4-B

Adjustable, vertical blowout water closet "Rigid System" with 4" [102mm] No-Hub connections and (2) 4" [102mm] side inlets. Complete with Dura-Coated cast iron double main fitting, with 2" [51mm] vent, adjustable gasketed face plate, universal floor mounted foot supports, corrosion resistant adjustable ABS coupling with integral test cap, fixture bolts, trim, stud protectors, and bonded "Neo-Seal" gasket.

13-1/4 [336]

PRODUCT/DEFINITION

_Z1204-2ND4B No-Hub Stack, Double Inlet, (2) 4 [102] Side Inlets, 2 [51] Vent

Ph	(EF	-IX	E	5	
			-	7	

D.C.C.I. System with Zurn "ZZ" Adjustable Coupling

Z1204-2ND4-B 4 [102] 4 [102] 5 [127] 6-5/8 [168] 5-1/2 [140]

D.C.C.I. System with NPT Face Plate, Non-Adjustable Coupling ZQ

SUFFIXES

1.

2.

00110(20			
A	Auxiliary Support Assembly	VP	Vandal Proof Trim
	(for 'P' Dim. Greater Than 18 [457])	-X3	3 [76] Carrier Foot Extension
CC	Corrosion Resistant 6 [152] Long Cast Iron Coupling		(See Z1200-FT-EXT-3)
CL	Coupling Length Other than Standard 6 [152]	X4	4 [102] Carrier Foot Extension
	(Specify Length Required)		(See Z1200-FT-EXT-4)
-M	Auxiliary Foot Support	-45	Finishing Frame for Blowout Closet
	(for 'P' Dim. 10 - 18 [254 - 457])		(See Z1200-FINFRAME-B)
PF	Pre-Fab Foot	-50	Flush Valve Supply Support for W.C.
PS	Pre-Fab Slotted Foot		(See Z1200-SPLY-SPRT-WC)
RYK	Unistrut Pre-Fab Foot		· · · · · · · · · · · · · · · · · · ·

* Regularly furnished unless otherwise specified.

139 [63]