




Z1171-94

LOW PROFILE GREASE INTERCEPTOR WITH EXTENSION, ANCHOR FLANGE AND CLAMP COLLAR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

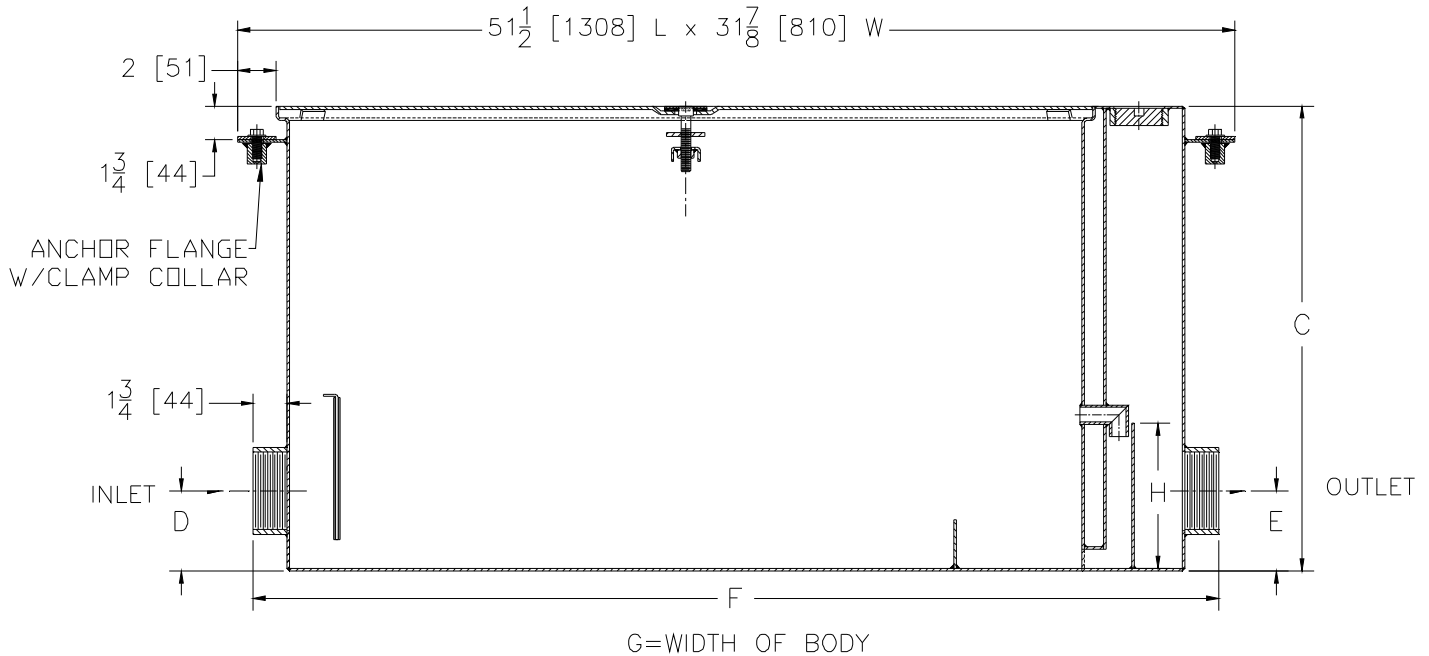

Size	Inlet/Outlet Size	Flow Rate GPM [L]	Capacity		Approx. Wt. Lbs. [kg]	Dimension in Inches [mm]				
			Water Gal. [L]	Grease Lbs. [kg]		C	D/E	F	G	H
800	*3 [76]	50 [189]	45 [170]	100 [45]	260 [118]	24 [610]	10 [254]	49-7/8 [1267]	29 [737]	10 [254]

ENGINEERING SPECIFICATION: ZURN Z1171-94

Acid resistant coated interior and exterior fabricated steel low type grease interceptor, PDI rated at 50 GPM [189 L] and 100 Lbs. [45 kg] grease capacity, with internal air relief by-pass, bronze cleanout plug, removable pressure equalizing/flow diffusing inlet baffle, fixed bottom outlet baffle, visible double wall trap seal, integral extension, anchor flange and clamp collar. Gasketed non-skid secured cover, complete with center tie down assembly and Z1108 flow control fitting. Regularly furnished with 3" [76mm] low inlet and outlet.*

OPTIONS (Check/specify appropriate options)

PREFIXES

- ___ Z Acid Resistant Coated Fabricated Steel*
- ___ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- ___ -L Angle Type (Z1108-L) Flow Control Device with Plunger.
- ___ -PW Plug Wrench

* Regularly furnished unless otherwise specified.