




**Z-1173-89**  
**GREASEPTOR AND ADJUSTABLE**  
**ENCLOSED RECESSING RECEIVER**

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches or [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

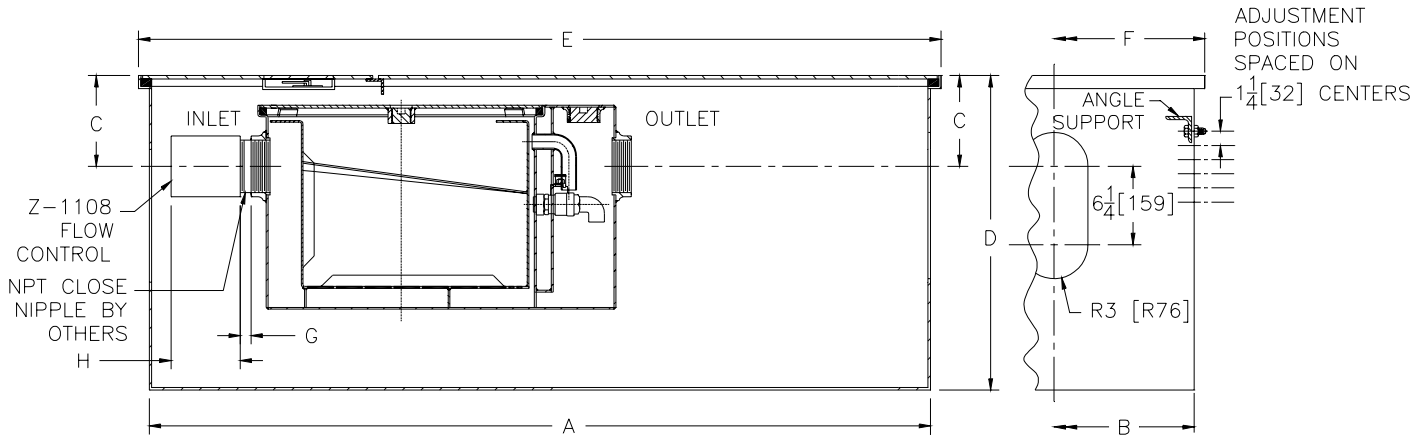

Size	Dimensions In Inches							
	A	B	C	D	E	F	G	H
300	55 7/8[1419]	15 3/8[391]	4 3/8[111]	19 1/8[486]	57 7/8[1470]	17 3/8[441]	1/2[13]	5 7/16[138]
400	58 1/2[1486]	17 1/2[445]	4 7/8[124]	20 3/4[527]	60 1/2[1537]	19 1/2[495]	5/8[16]	6 1/8[156]
500	60 5/8[1540]	20[508]	5 3/8[137]	22 3/8[568]	62 5/8[1591]	22[559]	5/8[16]	6 1/8[156]
600	63 1/4[1607]	20 3/4[527]	5 3/4[146]	24[610]	65 1/4[1657]	22 3/4[578]	5/8[16]	6 1/8[156]
700	68 1/2[174]	23 1/4[591]	5 7/8[149]	25 3/4[654]	70 1/2[1791]	25 1/4[641]	5/8[16]	6 1/8[156]
800	69[1753]	26[660]	5 7/8[149]	27 3/4[705]	71[1803]	28[711]	5/8[16]	6 1/8[156]
900	71 3/4[1822]	28[711]	6 7/8[175]	30 1/2[775]	73 3/4[1873]	30[762]	5/8[16]	6 1/8[156]

**ENGINEERING SPECIFICATION:** ZURN Z-1173-89 Acid Resistant Epoxy Coated Receiving receiver equipped with adjustable support brackets and gasketed non-skid cover with recessed and covered lift handle. Complete with Z-1173 Greaseptor (for greaseptor specifications see Z-1173 drawing) and Z-1108 flow control fitting.

REV.	DATE: 1/7/98	C.N. NO. 79493
DWG. NO. P-14585		PRODUCT NO. Z-1173-89