




**Z-1186-111  
OIL INTERCEPTOR  
W/ INTEGRAL STORAGE TANK**

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

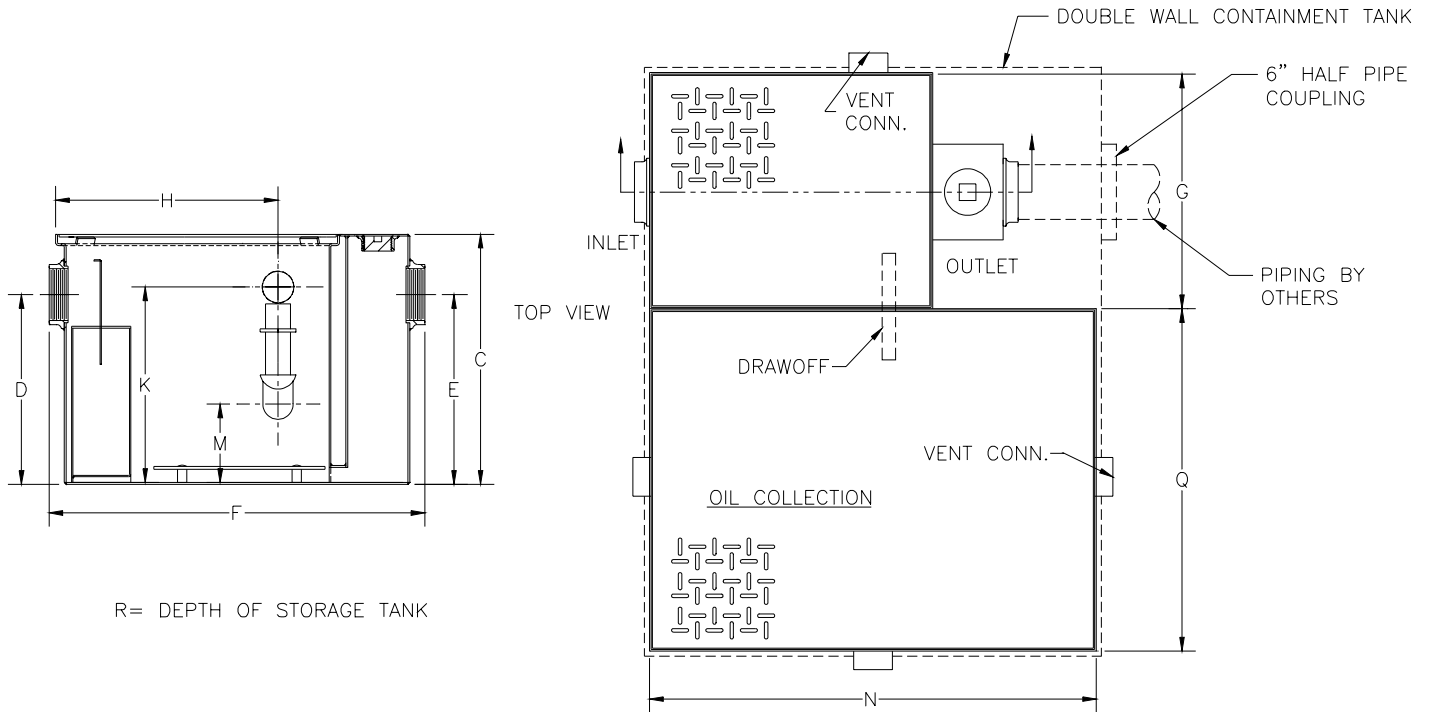

R= DEPTH OF STORAGE TANK

SIZE	Inlet/Outlet Size**	Flow Rate G.P.M.	Water Capacity Gal.[L]	Approx. Wt. Lbs.[kg]	Oil Storage Tank Capacity Gal.[L]
700	3 [76]	35 [132]	21 [79]	140 [47]	50 [189]

Dimensions in inches										
	C	D/E	F	G	H	K	M	N	Q	R
700	19 3/4 [483]	12 1/2 [318]	29 7/8 [759]	19 7/8 [505]	16 3/8 [416]	16 3/4 [425]	6 7/16 [164]	50 3/4 [1289]	15 [381]	29 [737]

**ENGINEERING SPECIFICATION:** ZURN Z-1186-111 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, oil drawoff, vent connections, secured gasketed non-skid cover, complete with flow control fitting, integral storage tank and double wall containment tank. Regularly furnished with inlet and outlet in high position.

**OPTIONS** (Check/specify appropriate options)

**PREFIXES**

- **Z-** Acid Resistant Coated Fabricated Steel\*
- **\*\*** Inlet and outlet sizes shown indicate standard operating sizes and flow control settings. Size #300 and #400 will have 3 [76] connections reduced to 2 [51] as standard. Size #500 thru #800 will have connections reduced to 3 [76] as standard. If changed, flow control and air relief by-pass must be adjusted accordingly.

<b>REV.</b>	<b>DATE: 11/29/01</b>	<b>C.N. NO. 88194</b>
<b>DWG NO. P-14856</b>	<b>PRODUCT NO. Z-1186-111</b>	

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED