



Z895-105



12 [305] WIDE REVEAL TRENCH DRAIN SYSTEM W/ 6 [152] WIDE THROAT

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

SPECIFYING ENGINEER IS RESPONSIBLE FOR CONCRETE ENCASEMENT AND REINFORCING BASED UPON APPLICATION AND LOCAL CODES

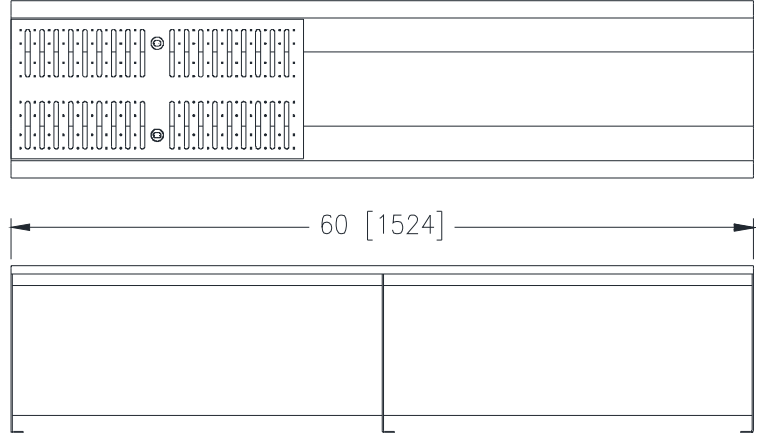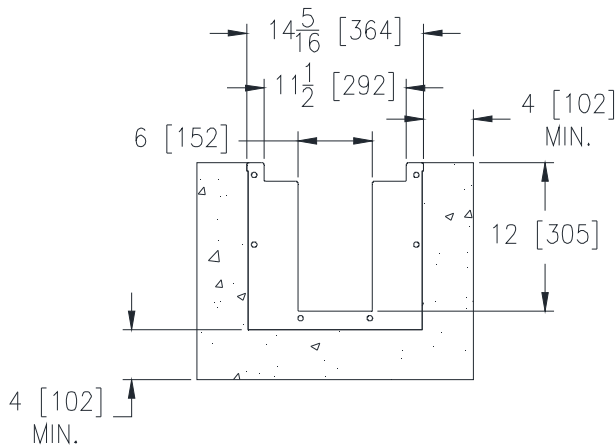

ENGINEERING SPECIFICATION: Zurn Z895-105

Channels shall be 60" [1524mm] long, 12" [305mm] wide and have a 6" [152mm] throat. Modular channel sections shall be made of 12ga. fabricated Stainless Steel conforming to ASTM A-240 (type 304). Channels shall have a bolted, flanged connection between channel sections that will not separate during the installation, gaskets available. Channels shall weigh less than 4.15 lbs. [1.05kg] per linear foot, have a flat bottom with a neutral 0% built in slope and a 12" [305mm] invert. Channels shall have feet for patty pour or leveling studs standard to secure trench in its final location. Shall be provided with standard FS grates that lock down to frame. Zurn 12" [305 mm] wide reveal Fabricated Stainless Steel Grate conforming to ASTM specification A-240, (type 304), is rated class A per the DIN EN1433 top load classification. Supplied in 24" [610mm] nominal lengths with 5/16" [8mm] wide slots, and 1-1/4" [32mm] bearing depth. Grate has an open area of 25.61 sq. in per ft. [542.09 sq. cm per meter]. Channels shall be produced in the U.S.A.

PREFIX OPTIONS (Check/specify appropriate options)

Z Five-foot, Type 304 Stainless Steel*

SUFFIX OPTIONS (Check/specify appropriate options)

Grate Options (Load Classifications are per DIN EN1433)
 -HPD Heel-Proof Ductile Slotted Grate - Class C

MADE in the U.S.A.

-ADA-USA Meets Americans with Disabilities Act Requirements - Class C
 -FS Fabricated Stainless Steel Slotted Grate - Class A*
 -GG Fiberglass Grate - Class A
 -PS Perforated Stainless Steel Grate - Class A
 -SBG-L Stainless Steel Bar Grate - Class C

* Regularly furnished unless otherwise specified.

Outlet Adapters Add/Each

-E1 Closed End Cap-U4
 -E4 4 [102] No-Hub End Outlet
 -E6 6 [152] No-Hub End Outlet
 -U4 4 [102] No-Hub Bottom Outlet
 -U6 6 [152] No-Hub Bottom Outlet

Miscellaneous Options

-DB Bottom Dome Strainer
 -K Anchor Flange
 -KC Clamp Collar and Pan