




Z1188-ST-83

SPECIFICATION SHEET

LARGE CAPACITY OIL INTERCEPTOR W/ INTEGRAL STORAGE TANK ON RIGHT SIDE & PUMP CONNECTION

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

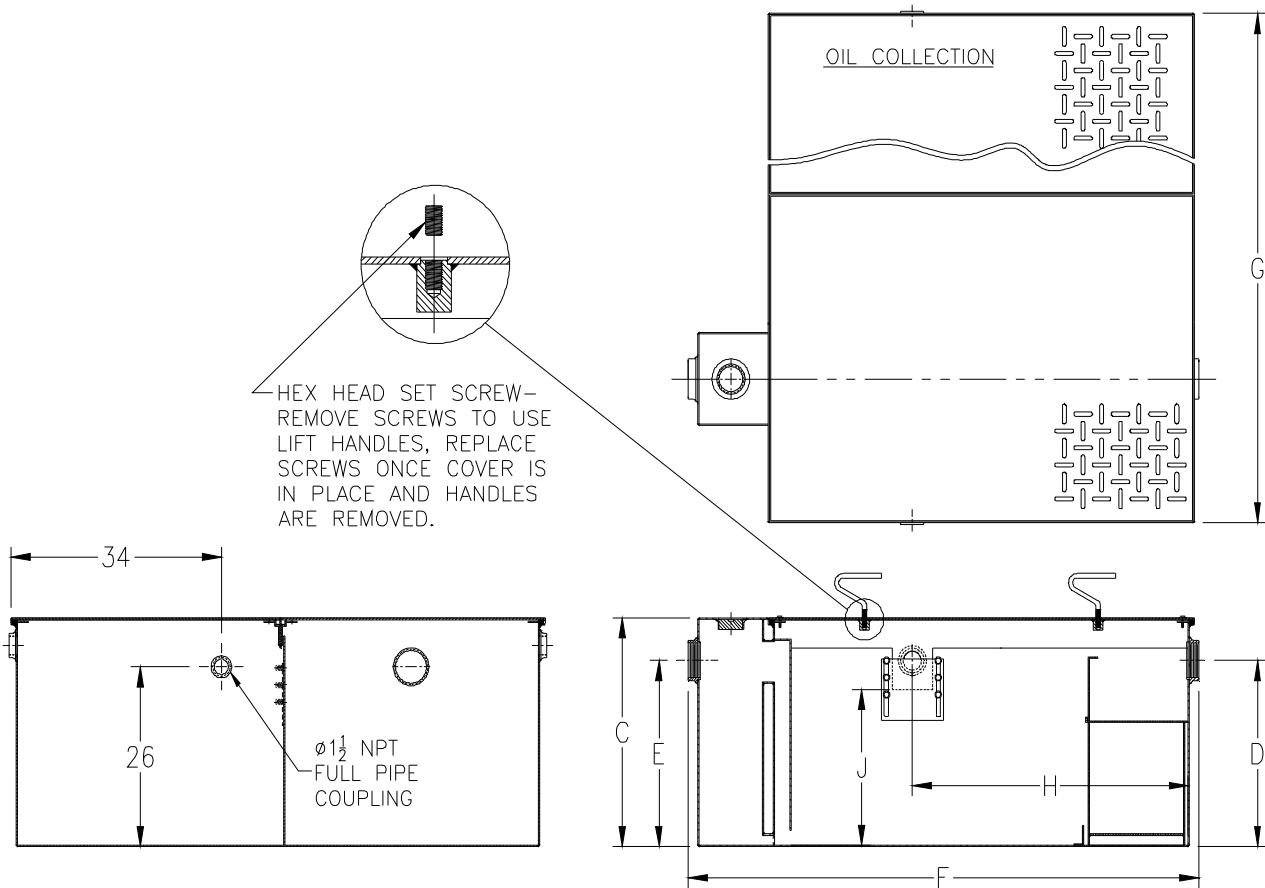

Flow Rate GPM [L] Min.	Oil Storage Tank Cap. Gal. [L]	No. of Covers	
		Trap	Tank
150[568]	250[946]	2	2

Flow Rate GPM [L] Min.	Inlet/ Outlet Size	Water Capacity Gal. [L]	Approx. Wt. Lbs. [kg]	Dimensions in Inches					
				C	D/E	F	G	H	J
150 [568]	4 [102]	235 [890]	1640 [743]	30-3/4 [781]	25-1/4 [641]	68-1/4 [1734]	82-3/4 [2102]	38-11/16 [983]	21-5/8 [549]

ENGINEERING SPECIFICATION: ZURN Z1188-ST-83 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, adjustable oil draw-off, vent connections, secured gasketed non-skid cover, complete with flow control fitting and right hand integral storage tank. Regularly furnished with inlet and outlet in high position. Note: location of outlet from bottom of interceptor cannot be changed.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

___ -E Integral Acid Resistant Coated interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.

REV.	DATE: 11/23/10	C.N.NO. 120517
DWG. NO. 303510	PRODUCT NO. Z1188-ST-83	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED