




Z-1183-78

SOLIDS INTERCEPTOR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

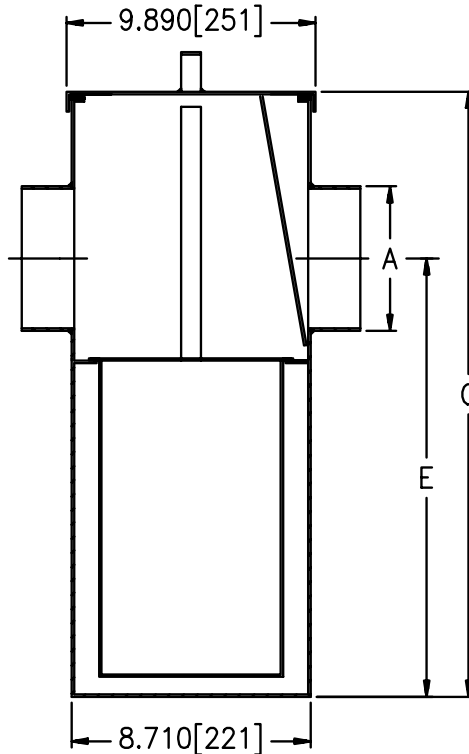

G=WIDTH OF BODY

Inlet/ Outlet Size	Flow Rate G.P.M. [L]	Approx. Wt. Lbs. [Kg]	Dimensions In Inches		
			C	G	D/E
4 [100]	100 [379]	100 [45]	30 3/4 [781]	21 3/8 [543]	25 1/4 [641]
4 [100]	125 [473]	100 [45]	30 3/4 [781]	21 3/8 [543]	25 1/4 [641]
4 [100]	150 [568]	100 [45]	30 3/4 [781]	21 3/8 [543]	25 1/4 [641]

ENGINEERING SPECIFICATION: ZURN Z-1183-78 Large capacity acid resistant coated fabricated steel, or stainless steel, solids interceptor, for on floor or semi-recessed installation cores with screen attached to gasketed, removable, latched lid, and removable sediment basket. Size to be used with corresponding Z-1170 or Z-1190 Interceptors.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ___ Z- Acid Resistant Coated Fabricated Steel*
- ___ ZS- Stainless Steel

SUFFIXES

- ___ -SS Custom Stainless Mesh Screen for Bucket. (Specify opening size)
- ___ -YR Replacement Bucket Assembly

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 4/28/98	C.N. NO. 80276
DWG. NO. P-14617 PRODUCT NO. Z-1183-78		