




Z-1186-109
OIL INTERCEPTOR
W/ INTEGRAL STORAGE TANK

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

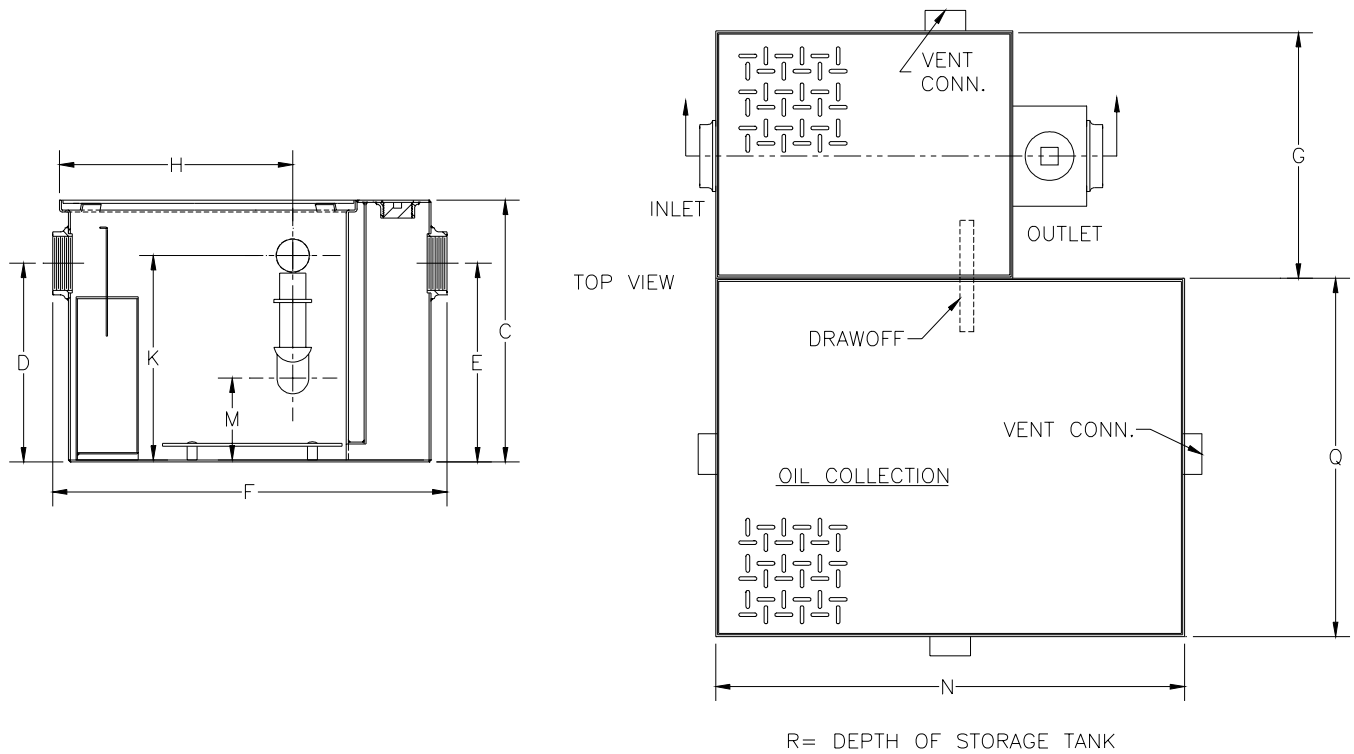

| SIZE | Inlet/Outlet Size** | Flow Rate G.P.M. | Water Capacity Gal.[L] | Approx. Wt. Lbs.[kg] | Oil Storage Tank Capacity Gal.[L] |
|------|---------------------|------------------|------------------------|----------------------|-----------------------------------|
| 500 | 3 [76] | 20 [76] | 10 [38] | 548 [249] | 100 [379] |

| Dimensions in inches | | | | | | | | | | |
|----------------------|--------------|-------------|--------------|--------------|--------------|--------------|--------------|-----------|-----------|--------------|
| SIZE | C | D/E | F | G | H | K | M | N | Q | R |
| 500 | 15 1/2 [394] | 9 3/8 [238] | 27 1/8 [689] | 16 3/4 [425] | 13 1/4 [337] | 12 1/2 [318] | 5 9/16 [141] | 70 [1778] | 66 [1676] | 15 1/2 [394] |

ENGINEERING SPECIFICATION: ZURN Z-1186-109 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, oil drawoff, vent connections, secured gasketed non-skid cover, complete with flow control fitting and integral storage tank. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

- _____ Z- Acid Resistant Coated Fabricated Steel*
- _____ ** Inlet and outlet sizes shown indicate standard operating sizes and flow control settings. Size #500 will have connections reduced to 3 [76] as standard. If changed, flow control and air relief by-pass must be adjusted accordingly.

| | | |
|------------------------|-------------------------------|-----------------------|
| REV. | DATE: 1/11/01 | C.N. NO. 86291 |
| DWG NO. P-14814 | PRODUCT NO. Z-1186-109 | |

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED