


Z1185-127 **60 GPM LINT INTERCEPTOR**

SPECIFICATION SHEET

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

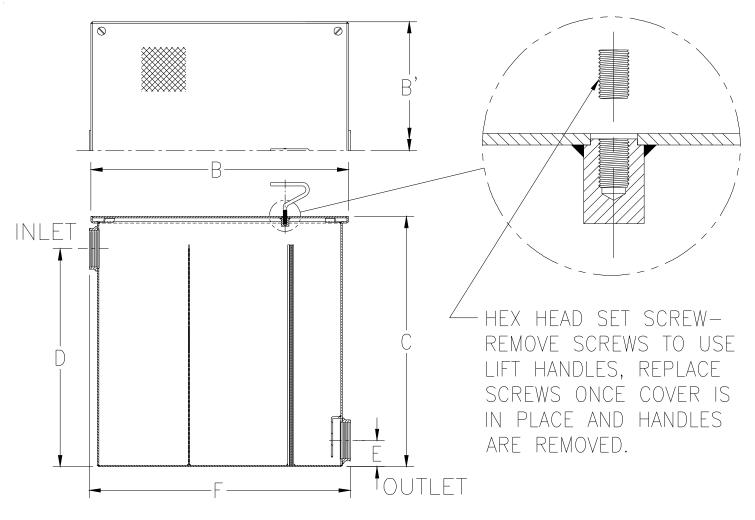

Size No.	of Inlet/Outlet	Flow Rate G.P.M. [L]	Approx. Wt. Lbs. [kg]	Dimensions In Inches						
Machines				В	Β'	С	D	E	F	
2	3 [76]	60 [226]	126 [57]	28 [711]	18 [457]	21 [533]	18 [457]	3 1/4 [82]	28 1/2 [724]	

ENGINEERING SPECIFICATION: ZURN Z1185-127 Acid Resistant Coated interior and exterior fabricated steel lint interceptor, non-skid secured cover with removable lift handle, stainless lint intercepting secondary screen assembly and permanent primary straining baffle. Regularly furnished with high inlet and low outlet. Note: Cover not furnished with lift handle.

OPTIONS (Check/specify appropriate options)

PREFIXES

- Z Acid Resistant Coated Fabricated Steel*
 - _ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES -E

- Acid Resistant Coated interior and exterior fabricated steel extension section (Specify 'C' dimension required for recessed installation).
- Stainless Steel Screen Replacement Assembly -RS

	REV.	DATE:	07/08/10	C.N. NO. 111355					
*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED	DWG. NO. 301230		PRODUCT NO. Z1185-127						
ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514 Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com									

In Canada: ZURN INDUSTRIES LIMITED 🔶 3544 Nashua Drive 🔶 Mississauga, Ontario L4V1L2 🌩 Phone: 905/405-8272 Fax: 905/405-1292