


Z1020-10 ELECTRONIC TRAP PRIMER W/ 10 OUTLETS

SPE			IANI	CHE	
SPE	СІГ	CAI	IUN	ЭПС	==

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

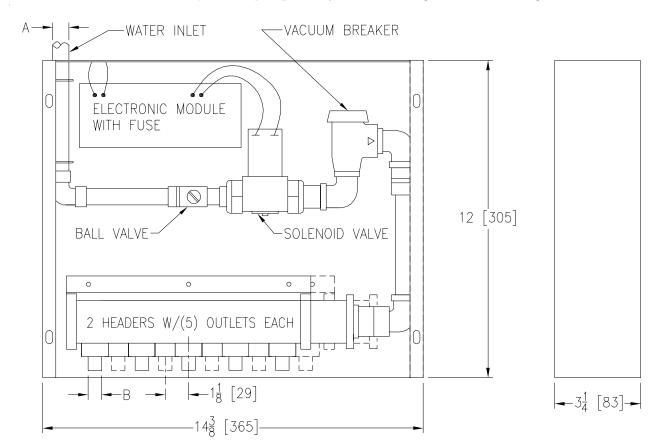

Dimension	Approx. Wt. Lbs.	
А	В	[kg]
1/2 [13]	1/2 [13]	12 [5]

ENGINEERING SPECIFICATION: ZURN Z1020-10

Electronic trap primer programmed as standard to provide a six second water injection to traps every twenty-four hours*, complete with galvanized steel combination surface or recessed mount box and cover, 1/2 [13] solder copper inlet connection, brass ball type stop valve, slow closing 24 VAC solenoid valve with integral strainer, 120 - 24 VAC transformer, brass atmospheric vacuum breaker, PEX waterway, and two anti-scaling multi-port manifolds with five 1/2 [13] Male PEX outlet connections. (For copper connection outlets -CW option must be specified.)

OPTIONS (Check/specify appropriate options)

SUFFIXES

_ -CW Copper Waterway (with 1/2 [13] Female I.P.S. Connection)

-DU4 Additional Distribution Units with Copper Waterway (Specify Quantity)
(Contact Zurn for Sizing Specifications)

REV. A DATE: 11/13/06 C.N. NO. 95849

DWG. NO. 82955 PRODUCTNO. Z1020-10

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED