




Z1187-SI-81 SAND INTERCEPTOR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

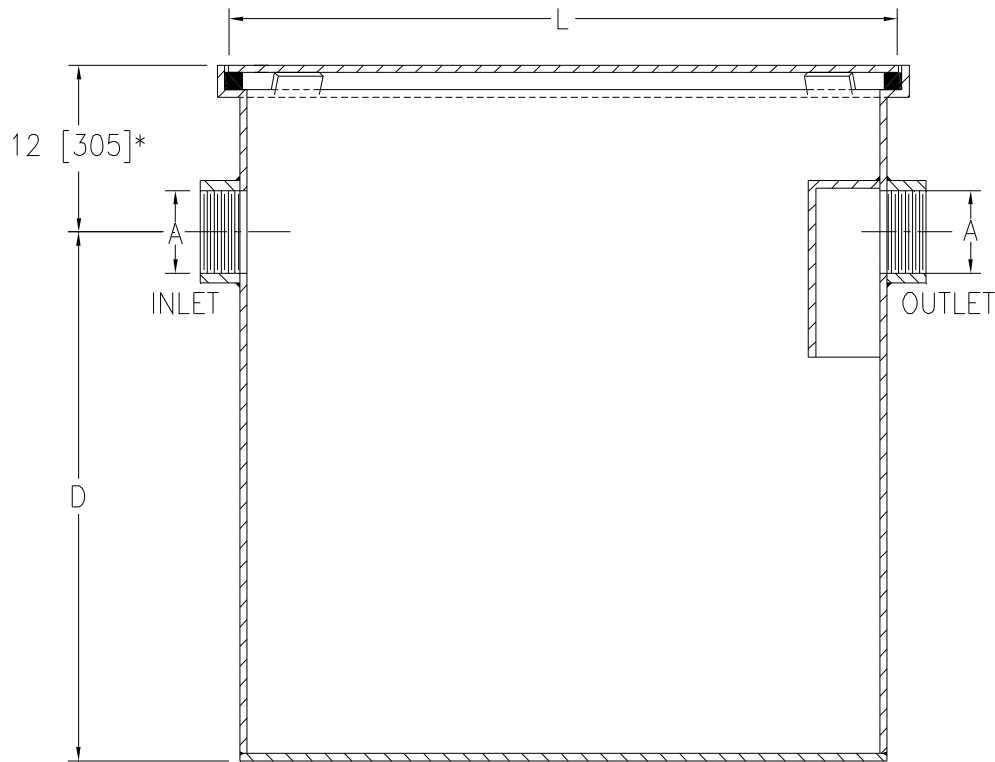

*12[305] REGULARLY FURNISHED
SPECIFY DIMENSION IF HIGHER
OR LOWER IS REQUIRED

Size	Flow G.P.M. [L] (Max.)	A Pipe Size	L	D	Capacity Gal. [L] (Static)	Width
20	20 [76]	4 [102]	24 [610]	26 [660]	60 [227]	24 [610]
50	50 [189]	4 [102]	48 [1219]	26 [660]	120 [454]	24 [610]

ENGINEERING SPECIFICATION: ZURN Z1187-SI-81 Acid Resistant Coated interior and exterior fabricated steel sand interceptor with threaded inlet and outlet, complete with secured, gasketed, non-skid cover.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

- ___ -E 6[152] Integral extension assembly for recessed installation
- ___ -NH No-Hub Inlet and Outlet (Specify Size)
- ___ -VP Vandal Proof Screws

REV. A	DATE: 01/08/08	C.N. NO. 97928
DWG. NO. P-15382 PRODUCT NO. Z1187-SI-81		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED