




# Z1170-138

## GREASE INTERCEPTOR W/ CUSTOM INLET/OUTLET

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

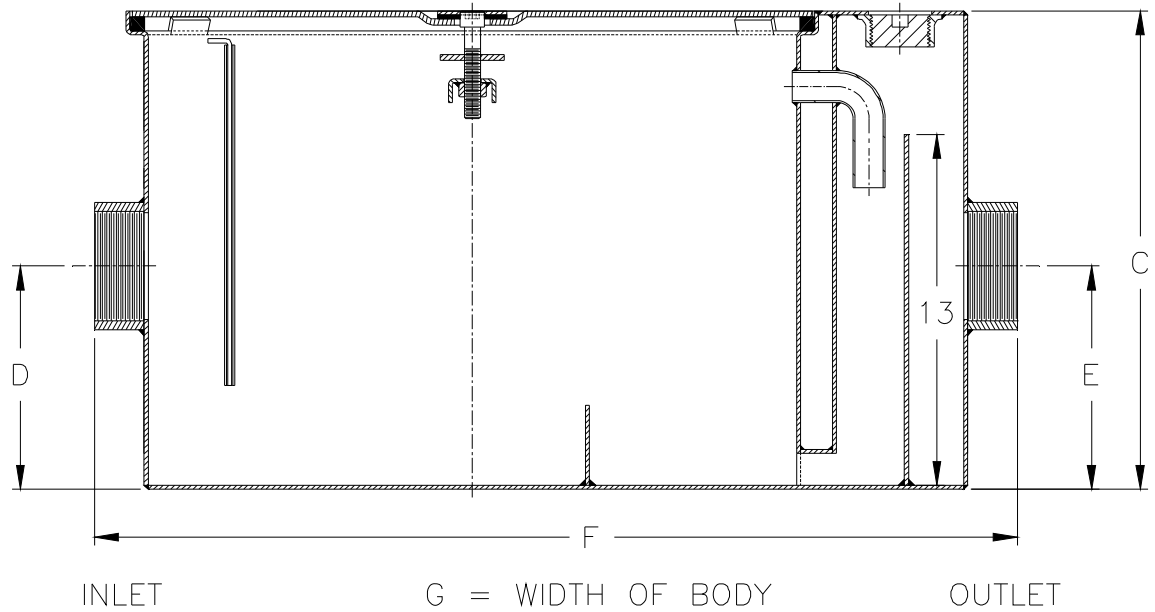

Inlet/ Outlet Size*	Approx. Wt. Lbs. [kg]	Dimensions in Inches			
		C	D/E	F	G
3 [76]	151 [68]	18 3/4 [476]	7 [178]	34 1/8 [867]	22 1/2 [572]

**ENGINEERING SPECIFICATION:** ZURN Z1170-138 Acid Resistant Coated interior and exterior fabricated steel grease interceptor, with internal air relief by-pass, bronze cleanout plug, removable pressure equalizing/flow diffusing inlet baffle, fixed bottom outlet baffle, and visible double wall trap seal. Gasketed non-skid secured cover complete with center tie down assembly, with Z1108 flow control fitting. Regularly furnished with a high inlet and outlet connection. **IMPORTANT:** Interceptor is not tested for any design performance.

**PREFIXES**

- \_\_\_ Z Acid Resistant Coated Fabricated Steel\*
- \_\_\_ ZS All Type 304 Fabricated Stainless Steel

**SUFFIXES**

- \_\_\_ -AL Aluminum Cover
- \_\_\_ -E Acid Resistant Coated Interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
- \_\_\_ -HD Heavy Duty Cover rated at 10,000 lbs. maximum safe live load. A 3 [76] minimum extension height is required when Heavy Duty Cover (-HD) option is specified.
- \_\_\_ -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide. A 3 [76] minimum extension height is required when anchor flange (-K) option is specified.
- \_\_\_ -KC Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar. A 3 [76] minimum extension height is required when anchor flange (-K) option is specified.
- \_\_\_ -L Angle type (Z1108-L) flow control device with plunger.
- \_\_\_ -R Acid resistant coated interior and exterior fabricated steel recessing receiver for recessed installation is equipped with adjustable support brackets and gasketed non-skid cover with covered recessed lift handle.
- \_\_\_ -RE Acid resistant coated interior and exterior fabricated steel recessing receiver enclosed type for recessed installation. Furnished with adjustable support brackets and gasketed non-skid cover with covered recessed lift handle.
- \_\_\_ -T Cover recessed for tile/terrazzo. A 3 [76] minimum extension height is required. (Specify recess depth - 1/8 [3], 3/4 [19], or 1 1/4 [32]).

REV.	DATE: 11/12/10	C.N. NO. 120375
DWG. NO. 303396		PRODUCT NO. Z1170-138

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED