




Z1173-102

EJECTO-MATIC GREASEPTOR W/ DRAW-OFF ON LEFT SIDE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

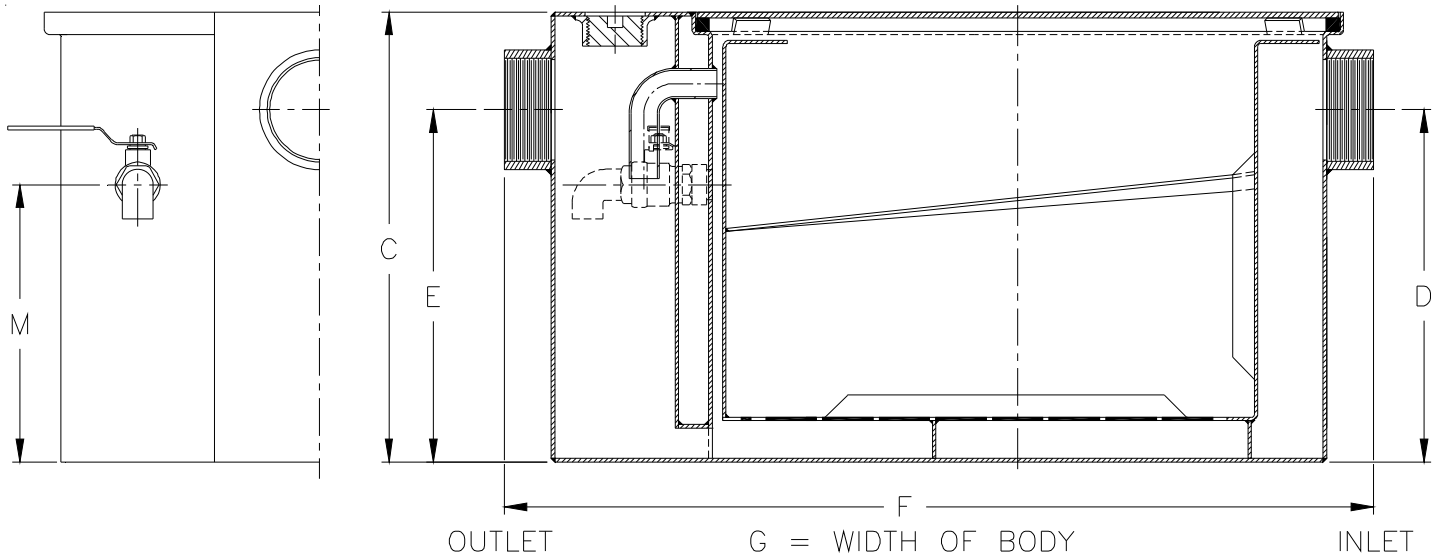

Size	Inlet/ Outlet Size* In. [mm]	Flow Rate G.P.M. [L/min.]	Capacity		Approx. Wt. Lbs. [kg]	Dimensions in Inches [mm]				
			Water Gal. [L]	Grease Lbs. [kg]		C	D/E	F	G	M C/L Valve
400	3 [76]	15 [57]	10 [38]	30 [14]	87 [39]	13-3/8 [340]	9-3/8 [238]	27-1/8 [689]	16-3/4 [425]	6-7/8 [175]
500		20 [76]	16 [60]	40 [18]	104 [47]	15 [381]	11-3/4 [298]	30 [762]	17-1/4 [438]	9-1/4 [235]
600		25 [94]	21 [79]	50 [23]	129 [59]	17 [432]	12-1/2 [318]	32-1/4 [819]	19-7/8 [505]	9-1/2 [241]
700		35 [132]	30 [113]	70 [32]	156 [71]	18-3/4 [476]	14-1/4 [362]	34-1/8 [867]	22-1/2 [572]	11-1/4 [286]
800		50 [189]	40 [151]	100 [45]	186 [84]	21-1/2 [546]	16 [406]	36 [914]	24-1/2 [622]	13 [330]
900		75 [284]	65 [246]	150 [68]	316 [143]	22-3/4 [578]	18-1/2 [470]	36 [914]	28-5/8 [727]	15-1/2 [394]

ENGINEERING SPECIFICATION: ZURNZ1173-102

Acid Resistant Coated interior and exterior fabricated grease interceptor, PDI rated at ____ GPM and ____ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable combination pressure equalizing/flow diffusing baffle and sediment tray and grease retention tray adjacent to grease draw-off valve, which is located on left side when facing outlet. Gasketed non-skid secured cover, complete with Z1108 flow control fitting. Regularly furnished with high inlet and outlet connections.*

PREFIXES

- ____ Z Acid Resistant Coated Fabricated Steel*
- ____ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- ____ -L Angle type (Z1108-L) flow control device.
- ____ -PW Plug Wrench
- ____ -R Recessing receiver for recessed installation is equipped with adjustable support brackets and gasketed non-skid cover with removable lift handle.
- ____ -RE Recessing receiver enclosed type for recessed installation. Furnished with adjustable support brackets and gasketed non-skid cover with removable lift handles.

NOTE: 1. Location of outlet from bottom of interceptor cannot be changed. Draw-off connection regularly furnished on outlet side.

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | Zurn Industries Limited
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. -
Date: 02/25/15
C.N. No. 132288
Prod. | Dwg. No. Z1173-102