




Z1172-132

LARGE CAPACITY GREASE INTERCEPTOR WITH 1750 GALLON CAPACITY

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

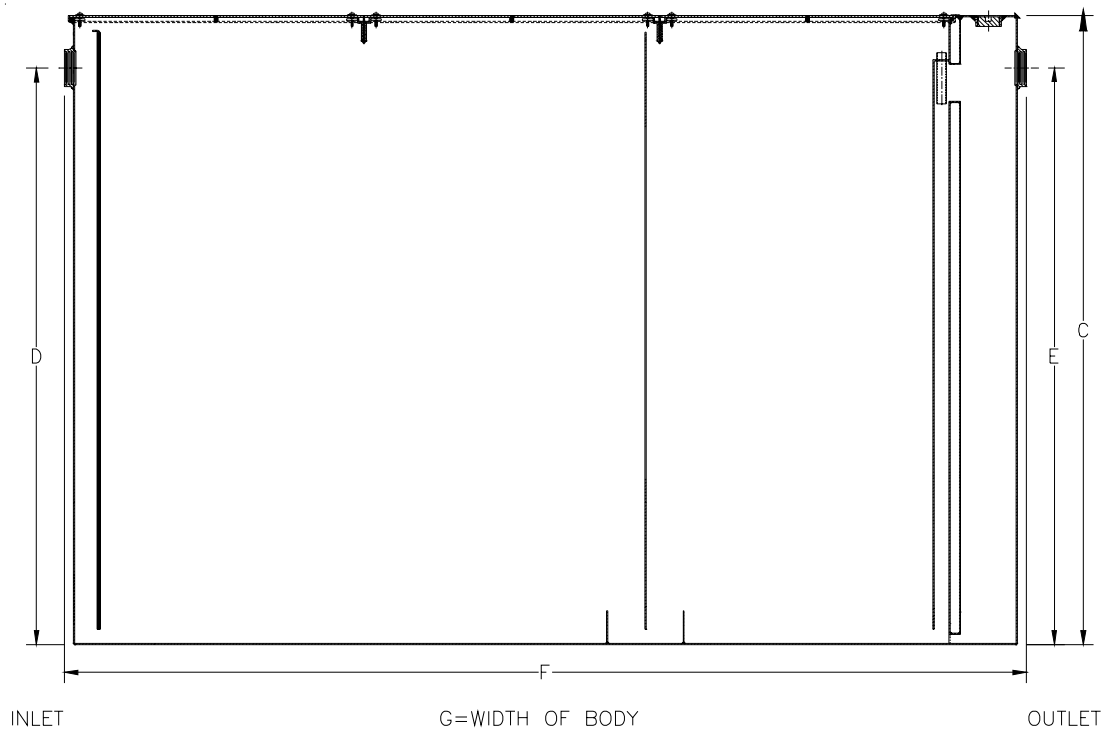

Size	Inlet/ Outlet Size**	Flow Rate G.P.M. [L]	Capacity		No. of Covers	Approx. Wt. Lbs. [kg]	Dimensions in Inches			
			Water Gal. [L]	Grease Lbs. [kg]			C	D/E	F	G
1900	6 [150]	500 [1890]	1750 [6625]	1000 [454]	3	3060 [1388]	67 7/8 [1724]	62 1/4 [1581]	104 [2642]	74 [1880]

ENGINEERING SPECIFICATION: ZURN Z1172-132 Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at 500 GPM and 1000 Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable pressure equalizing/flow diffusing baffle. Gasketed non-skid secured cover with removable lift handles, complete with flow control fitting. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ___ Z Acid Resistant Coated Fabricated Steel*
- ___ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- ___ -AL Aluminum Cover
- ___ -E Acid Resistant Coated Interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
- ___ -HD Heavy duty traffic cover rated at 10,000 lbs. maximum safe live load.
- ___ -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide.
- ___ -KC Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.
- ___ -L Angle type (Z1108-L) flow control device.

REV.	DATE: 10/6/05	C.N. NO. 93880
DWG. NO. P-15210 PRODUCT NO. Z1172-132		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED