




Z-1186-117

OIL INTERCEPTOR WITH INTEGRAL STORAGE TANK

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches or [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

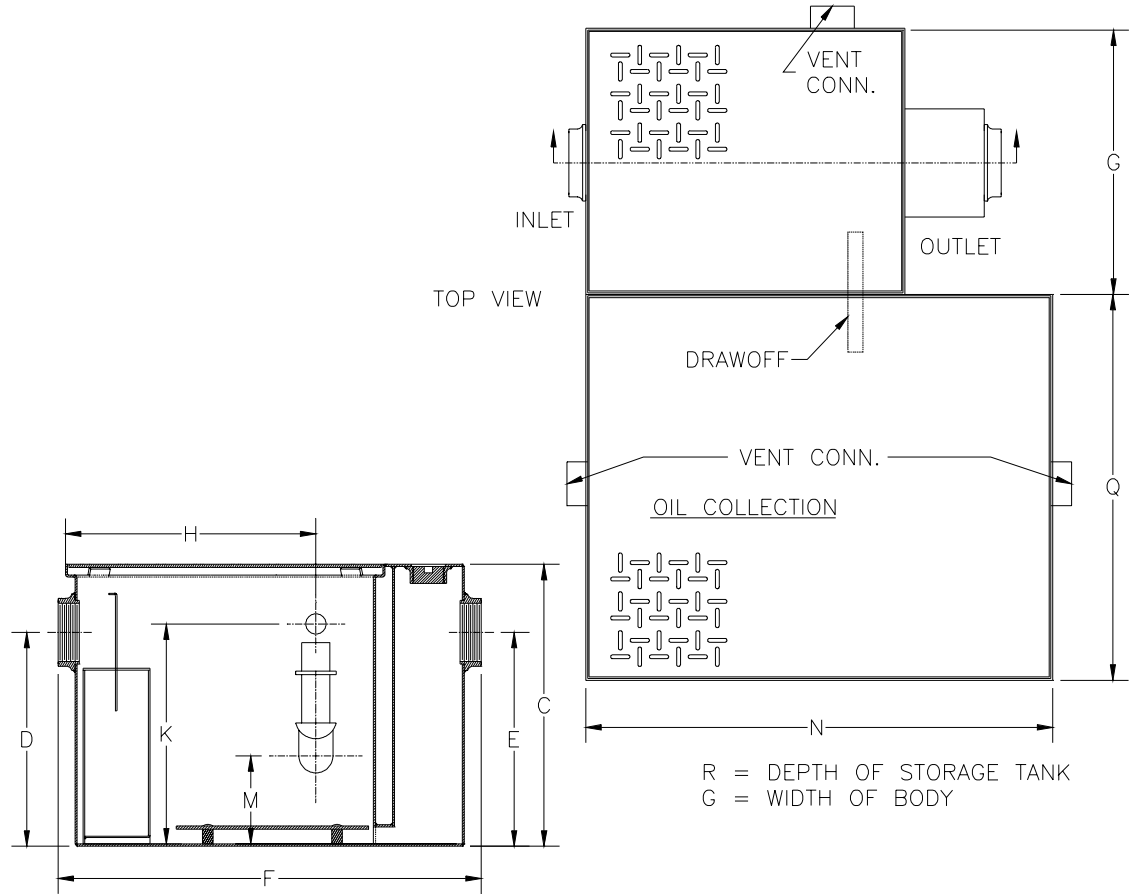

Size	Inlet/Outlet Size**	Flow Rate G.P.M.	Storage Tank Cap. Gal.[l]	Approx. Wt. Lbs.[kg]	Dimensions In Inches									
					C	D/E	F	G	H	K	M	N	Q	R
400	2 [50]	15 [56]	50 [189]	190 [86]	14 [356]	8 1/4 [210]	27 1/8 [689]	14 1/8 [359]	11 5/8 [295]	11 [279]	4 7/16 [113]	44 [1118]	19 1/2 [495]	25 [635]

ENGINEERING SPECIFICATION: ZURN Z-1186-117 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, oil drawoff, vent connections, secured gasketed non-skid cover, complete with flow control fitting and integral storage tank. **NOTE:** Location of outlet from bottom of interceptor cannot be changed.

OPTIONS (Check/specify appropriate options)

PREFIXES

_____ Z- Acid Resistant Coated Fabricated Steel*

** Inlet and outlet size shown indicates standard operating size and flow control setting. Size #400 will have 3" [75] connections reduced to 2" [50] as standard. If changed, flow control must be adjusted accordingly.

REV.	DATE: 3/28/02	C.N. NO. 88412
DWG. NO. P-14884		PRODUCT NO. Z-1186-117

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED