




Z1187-SI-84 SAND INTERCEPTOR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

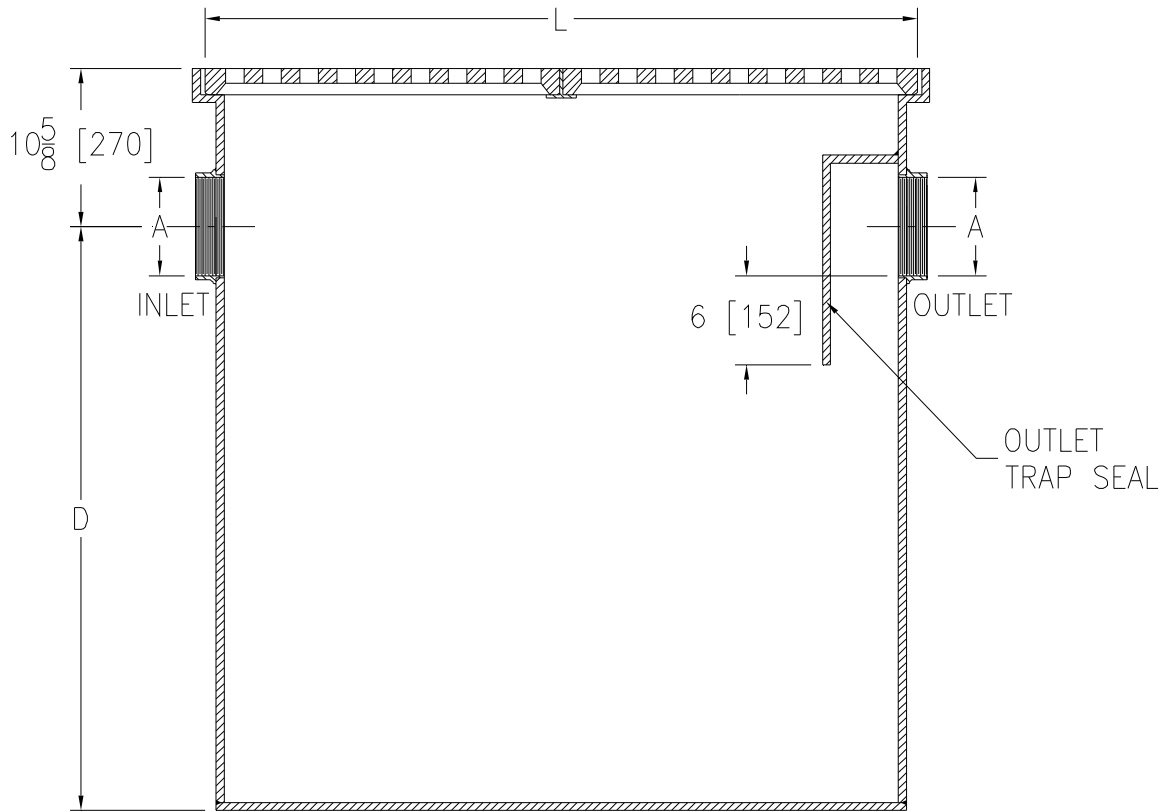

Size	Flow G.P.M. [L] (Max.)	A Pipe Size	L	D	Capacity Gal. [L] (Static)	No. of 12 x 24 [305 x 610] Grates	Width
150	150 [568]	6 [152]	48 [1219]	39 3/8 [1000]	360 [1363]	8	48 [1219]

ENGINEERING SPECIFICATION: ZURN Z1187-SI-84 Acid Resistant Coated interior and exterior fabricated steel sand interceptor with threaded inlet and outlet, complete with removable heavy duty grates.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

- ___ -E 6[152] Integral extension assembly for recessed installation
- ___ -DG Duresist Grate
- ___ -HD Extra heavy duty reinforced cover(s) for vehicular traffic.
(Specify working load requirements)
- ___ -NH No-Hub Inlet and Outlet (Specify Size)
- ___ -VP Vandal Proof Screws

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 12/20/07	C.N. NO. 97888
DWG. NO. P-15500 PRODUCT NO. Z1187-SI-84		