


## Z1172-164 75 GPM GREASE INTERCEPTOR W/ LOW INLET/OUTLET

SPECIF	CATION	SHEET

TAG

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

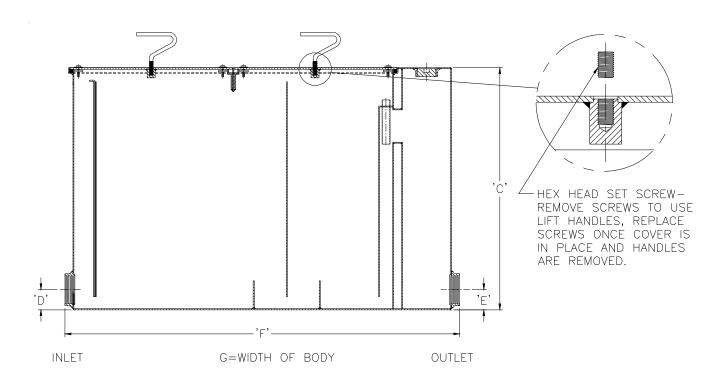

	Size	Inlet/ Flow Rate		Capacity		ပ	Approx.	Dimensions in Inches			
		Outlet G.P.M. Size [L]	Water	Grease	1 9 91	VVI. LDS.					
			Gal. [L]	Lbs. [kg]		[kg]	С	D/E	F	G	
	900	4 [102]	75 [284]	65 [246]	150 [68]	1	350 [159]	35 [889]	2-1/2 [64]	36 [914]	28-5/8 [727]

## **ENGINEERING SPECIFICATION: ZURN Z1172-164**

Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at 75 GPM and 150 Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug (which can be used as a sampling port) and visible double wall trap seal with removable pressure equalizing/ flow diffusing baffle. Gasketed non-skid secured cover with removable lift handles, complete with flow control fitting.

Caution: Installations using indirect piping to unit could result in standing water in floor sink or flooding if the line is blocked.

## **OPTIONS** (Check/specify appropriate options) **PREFIXES** \_ Z Acid Resistant Coated Fabricated Steel\* ZS All Type 304 Fabricated Stainless Steel **SUFFIXES** \_ -AL Aluminum Cover Anchor flange 1-3/4 [44] down from top and 2 [51] wide. (A 3 [76] minimum Extension Height is required when Anchor Flange (-K) Option -K -KC Anchor flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar. (A 3 [76] minimum Extension Height is required when Anchor Flange (-KC) Option is specified.) Angle type (Z1108-L) flow control device. -L -PW Plug Wrench Recessing receiver enclosed type for recessed installation. Furnished with gasketed non-skid cover with removable lift handles.

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

DATE: 07/24/12 C.N. NO. 124610 REV. **PRODUCT NO. Z1172-164** DWG. NO. 310162