




Z1170-156

SIZE 700 ADJUSTABLE RECESSING RECEIVER FOR GREASE INTERCEPTOR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

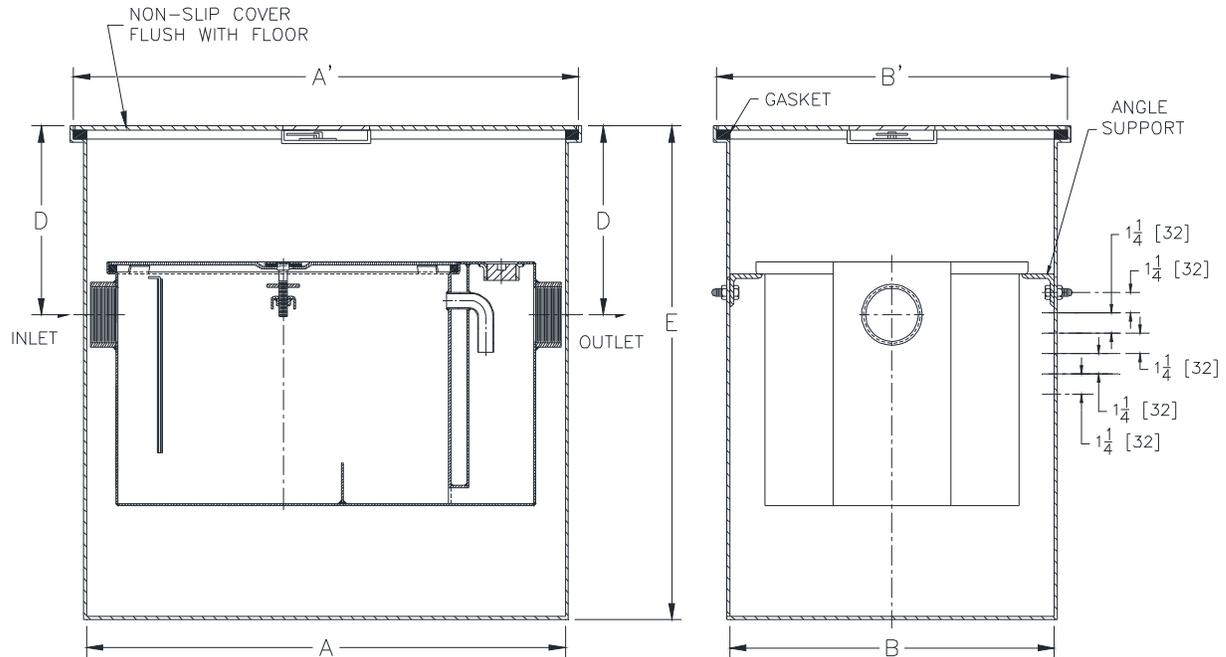

| Size | Dimensions In Inches [mm] | | | | | |
|------|---------------------------|----------|----------|----------|----------|---------------|
| | A | A' | B | B' | D | E |
| 700 | 35 [889] | 37 [940] | 26 [660] | 28 [711] | 29 [737] | 55-3/4 [1416] |

ENGINEERING SPECIFICATION: ZURN Z1170-156

Size 700 Acid Resistant Epoxy Coated Recessing receiver with integral extension, enclosed type, equipped with adjustable support brackets and gasketed non-skid cover with recessed and covered lift handle. Complete with Z1170 Grease Interceptor. For interceptor specifications see Z1170 specification sheet.

Prefixes

___ Z Acid Resistant Coated Fabricated Steel*

Suffixes

- ___ -K Anchor Flange 1-3/4 [44] Down From Top & 2 [51] Wide. A 3 [76] Minimum Extension Height is Required when Anchor Flange (-K) Option is Specified.
- ___ -KC Anchor Flange 1-3/4 [44] Down From Top & 2 [51] Wide w/ Clamp Collar. A 3 [76] Minimum Extension Height is Required when Anchor Flange (-KC) Option is Specified.
- ___ -T Cover Recessed for Tile/Terrazzo. A 3 [76] Minimum Extension Height is Required. (Specify Required Recess Depth - 1/8 [3], 3/4 [19], or 1-1/4 [32]).

* Regularly furnished unless otherwise specified.