




Z1172-149

LARGE CAPACITY GREASE INTERCEPTOR W/ COVER ENZYME PORT

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

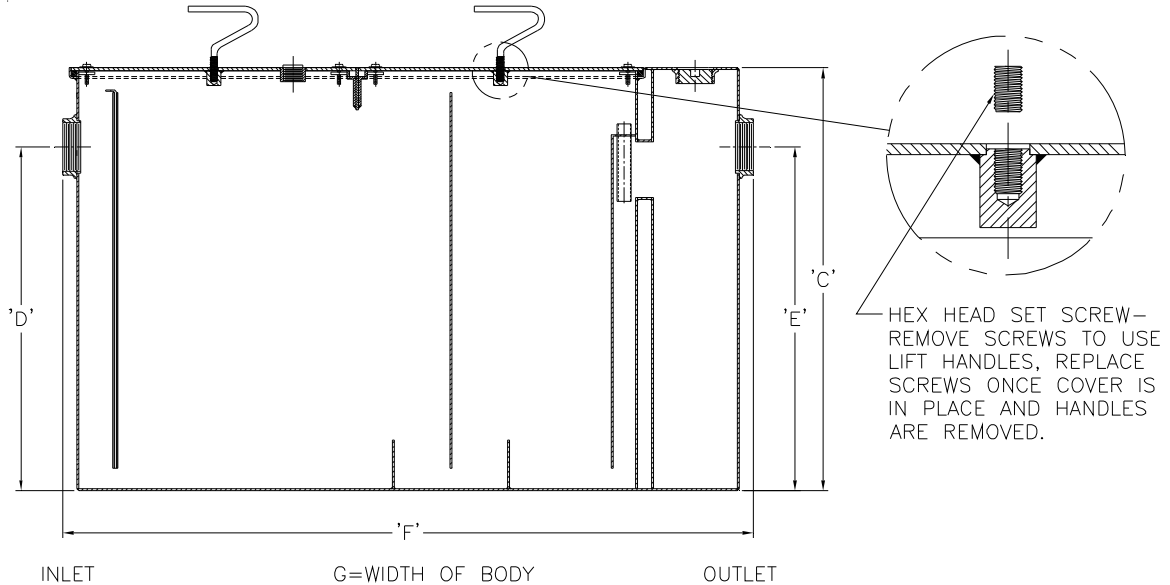

Size	Inlet/Outlet Size**	Flow Rate G.P.M. [L]	Capacity		No. of Covers	Approx. Wt. Lbs. [kg]	Dimensions in Inches				
			Water Gal. [L]	Grease Lbs. [kg]			C	D/E	F	G	
900	3 [75]	75 [284]	65 [246]	150 [68]	1	316 [143]	22 3/4 [578]	18 1/2 [470]	36 [914]	28 5/8 [727]	
1000		100 [378]	110 [416]	200 [91]		408 [185]	27 [686]	23 [584]	42 3/4 [1086]	33 5/8 [854]	
1100		125 [472]	150 [567]	250 [114]		749 [340]	30 1/8 [765]	24 1/2 [622]	49 1/4 [1251]	40 [1016]	
1200	4 [100]	150 [567]	195 [737]	300 [136]	2	856 [389]	30 3/4 [781]	25 1/4 [641]	56 [1422]	41 5/8 [1057]	
1300		200 [756]	270 [1021]	400 [182]		1016 [461]	35 1/2 [902]	29 7/8 [759]	61 [1549]	43 5/8 [1108]	
1400	5 [125]	250 [945]	465 [1758]	500 [227]	2	1384 [628]	41 [1041]	36 [914]	71 [1803]	51 5/8 [1311]	
1500		300 [1134]	665 [2514]	600 [272]		1770 [804]	46 1/4 [1175]	39 5/8 [1006]	80 [2032]	58 5/8 [1489]	
1600	6 [150]	350 [1323]	865 [3278]	700 [318]	2	2096 [951]	50 1/2 [1283]	43 7/8 [1114]	87 [2210]	63 5/8 [1616]	
1700		400 [1512]	1095 [4139]	800 [363]		3	2440 [1108]	54 1/4 [1378]	47 5/8 [1210]	94 [2388]	67 [1702]
1800		450 [1701]	1280 [4838]	900 [409]			2710 [1230]	55 1/4 [1403]	48 5/8 [1235]	100 [2540]	72 [1829]
1900		500 [1890]	1440 [5443]	1000 [454]		2857 [1297]	57 1/4 [1454]	51 5/8 [1311]	104 [2642]	74 [1880]	

ENGINEERING SPECIFICATION: ZURN Z1172-149

Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at ____ GPM and ____ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable pressure equalizing/flow diffusing baffle. Gasketed non-skid secured cover with covered removable lift handles & enzyme port complete with flow control fitting. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ___ Z Acid Resistant Coated Fabricated Steel*
- ___ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- ___ -AL Aluminum Cover
- ___ -E Acid Resistant Coated Interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
- ___ -HD Heavy duty traffic cover rated at 10,000 lbs. [4536 Kg.] maximum safe live load.
- ___ -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide.
- ___ -KC Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.
- ___ -L Angle type (Z1108-L) flow control device.
- ___ -RE Recessing receiver enclosed type for recessed installation. Furnished with gasketed non-skid cover with removable lift handles. (Sizes 900-1200 Only)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 11/12/07	C.N. NO. 97678
DWG. NO. P-15488	PRODUCT NO. Z1172-149	