




Z1173-99
RECESSING RECEIVER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

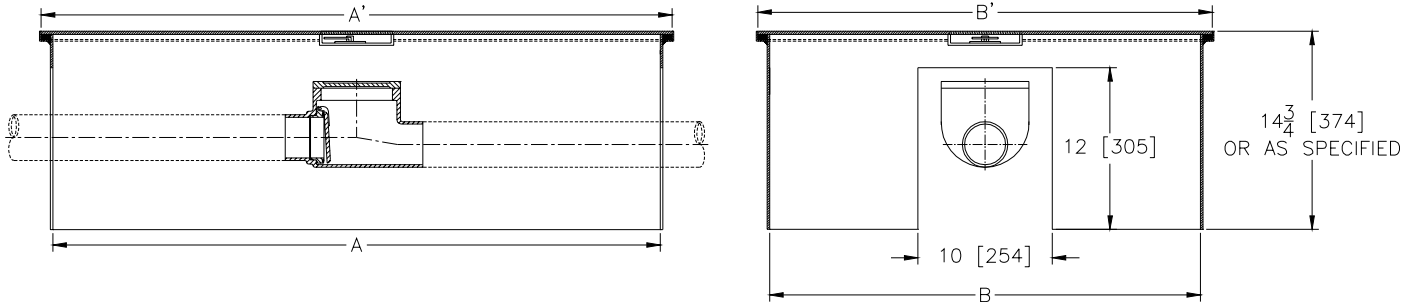

SIZE	Dimensions In Inches [mm]			
	A	A'	B	B'
900	45 1/8 [1146]	47 1/8 [1197]	32 [813]	34 [864]

ENGINEERING SPECIFICATION:

ZURN Z1173-99 Acid Resistant Epoxy Coated Recessing receiver equipped with gasketed secured non-skid cover with recessed and covered lift handle. Complete with Z1090 Backwater Valve (flapper type) for specifications see Z1090 drawing.

PREFIXES

_____ **Z-** Acid Resistant Coated Fabricated Steel*

SUFFIXES

- _____ **-K** Anchor flange 1-3/4"[44] down from top and 2"[51] wide. A 3"[76] minimum extension height is required when anchor flange (-K) option is specified. (Specify 'C' Dim. height required)
- _____ **-KC** Anchor flange 1-3/4"[44] down from top and 2"[51] wide with clamp collar. A 3"[76] minimum extension height is required when anchor flange (-KC) option is specified.
- _____ **-T** Cover recessed for tile/terrazzo. A 3"[76] minimum extension height is required. (Specify 'C' Dim. and required recess depth - 1/8"[3], 3/4"[19], or 1-1/4"[32]).

REV.	DATE: 6/20/03	C.N. NO. 91071
DWG. NO. P-14990 PRODUCT NO. Z1173-99		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED