




# Z-1185-77

## LINT INTERCEPTOR

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

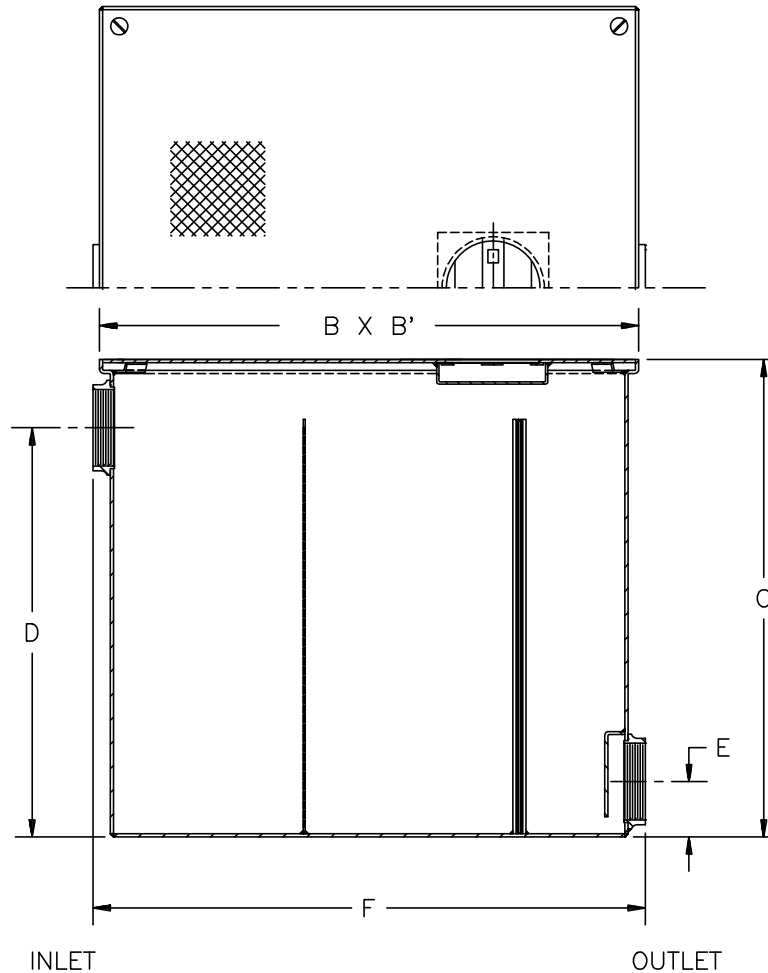

Size No. of Machines	Inlet/Outlet Size**	Flow Rate G.P.M. [L]	Approx. Wt. Lbs. [kg]	Dimensions In Inches					
				B	B'	C	D	E	F
8	4 [100]	40 [151]	100 [45]	42 3/8 [1076]	33 1/2 [851]	16 1/2 [419]	13 1/2 [343]	4 1/4 [108]	43 5/8 [1108]

**ENGINEERING SPECIFICATION:** ZURN Z-1185-77 Acid Resistant Coated interior and exterior fabricated steel lint interceptor, non-skid secured cover, with stainless lint intercepting secondary screen assembly and permanent primary straining baffle. Regularly furnished with high inlet and low outlet.

**OPTIONS** (Check/specify appropriate options)

**PREFIXES**

\_\_\_\_\_ Z- Acid Resistant Coated Fabricated Steel\*

**SUFFIXES**

\_\_\_\_\_ RS- Stainless Steel Screen Replacement Assembly

REV.	DATE: 02/19/96	C.N. NO. 74231
DWG. NO. P-14290 PRODUCT NO. Z-1185-77		

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED