





Z-1188-100 LARGE CAPACITY OIL INTERCEPTOR

TA G _____

Dimensional Data (inches or [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

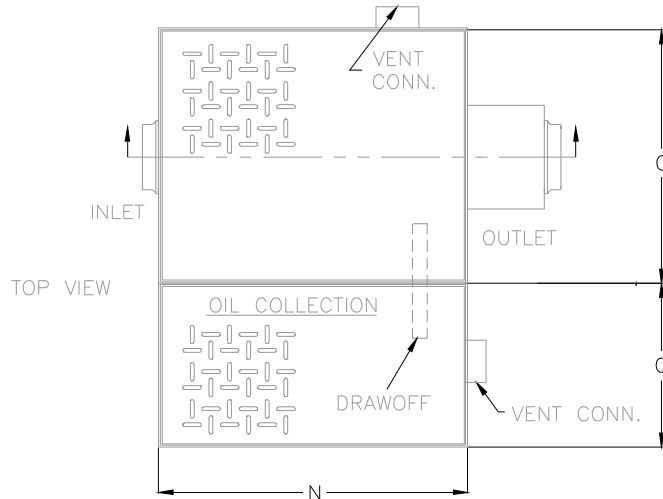

R = DEPTH OF STORAGE TANK
G = WIDTH OF BODY

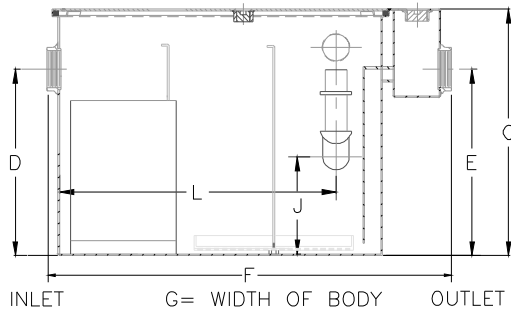

Flow Rate GPM[L]Min	Inlet/Outlet Size**	Water Capacity Gal. [L]	App. Wt. Lbs. [Kg]	No. of Covers	Dimensions In Inches								
					C	D/E	F	G	J	L	N	Q	R
100[379]	3[75]	110[306]	432[196]	1	27[686]	23[584]	42 3/4[1086]	33 5/8[854]	10 [254]	30 1/8[765]	32 3/4[832]	17 1/2[445]	27[686]

ENGINEERING SPECIFICATION: ZURN Z-1188 Large capacity Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil drawoff and vent connections either side. Secured gasketed non-skid cover complete with flow control fitting. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

_____ Z- Acid Resistant Coated Fabricated Steel*

SUFFIXES

- _____ -E Acid Resistant Coated interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
- _____ -HD Heavy duty traffic cover rated at 10,000 lbs [4536] kg. maximum safe live load.
- _____ -K Anchor flange 1 3/4 [44] mm down from top and 2 [51] mm wide. No extension required to accomodate -K.
- _____ -KC Anchor flange 1 3/4 [44] mm down from top and 2 [51] mm wide with clamp collar.

REV.	DATE: 5/31/96	C.N. NO. 75151
DWG. NO. P-14337	PRODUCT NO. Z-1188-100	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED