


## **Z1171-87**LOW PROFILE GREASE INTERCEPTOR W/ 6 [152] INTEGRAL EXTENSION

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

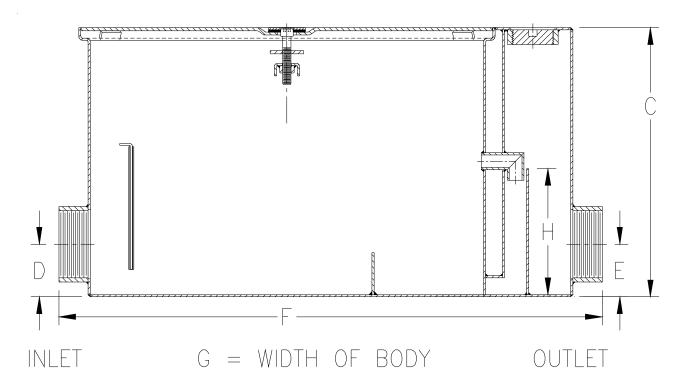

Size	Inlet/ Outlet Size*	Flow Rate Capa		acity	Approx.	Dimensions in Inches				
		G.P.M.	Water	Grease	Wt. Lbs. [kg]					
		[L] Gal. [l	Gal. [L]	Lbs. [kg]		С	D/E	F	G	Н
500	3* [76]	20 [76]	15 [60]	40 [18]	102 [46]	16 [254]	3-1/8 [79]	32-3/8 [822]	20-3/4 [527]	6-3/4 [171]
700		35 [132]	30 [113]	70 [32]	172 [78]	16-3/4 [273]	3-5/16 [84]	43-1/2 [1105]	29 [737]	7 [178]
800		50 [189]	45 [170]	100 [45]	210 [95]	22 [406]	10 [254]	49-7/8 [1267]	29 [737]	10 [254]

## **ENGINEERING SPECIFICATION: ZURN Z1171-87**

Acid Resistant Coated interior and exterior fabricated steel low type grease interceptor, PDI rated at \_\_\_\_\_ GPM and \_\_\_\_\_ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug, removable pressure equalizing/flow diffusing inlet baffle, fixed bottom outlet baffle, 6 [152] integral extension and visible double wall trap seal. Gasketed non-skid secured cover, complete with center tie down assembly and Z1108 flow control fitting. Regularly furnished with 3 [76] low inlet and outlet.\*

**OPTIONS** (Check/specify appropriate options)

## **PREFIXES**

Z Acid Resistant Coated Fabricated Steel\*

\_\_ ZS All Type 304 Fabricated Stainless Steel

## **SUFFIXES**

www.zurn.com

\_\_\_\_ -L Angle Type (Z1108-L) Flow Control Device with Plunger.

\_\_\_\_ -PW Plug Wrench

Caution: Installations using indirect piping to unit could result in standing water in floor sink or flooding if line blockage occurs.

**Zurn Industries, LLC | Specification Drainage Operation**1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | **Zurn Industries Limited**3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292

Rev.

Date: 12/20/13 C.N. No. 130371

Prod. | Dwg. No. Z1171-87

<sup>\*</sup> Regularly furnished unless otherwise specified.