



Z100-318


15 [381] DIAMETER MAIN ROOF DRAIN W/ STAINLESS STEEL PERFORATED PLATE, 4 [102] NO-HUB PERFORATED STANDPIPE & 14 [356] SQUARE TOP PROM DECK DRAIN W/ VANDAL-PROOF, HEEL PROOF GRATE AND SEDIMENT BUCKET

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

A- Pipe Size In. [mm]	Minimum Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
2,3,4 [51,76,102]	81 [37]	44 [284]
5,6 [127,152]	82 [37]	
8 [203]	83 [38]	
10 [254]	85 [38]	

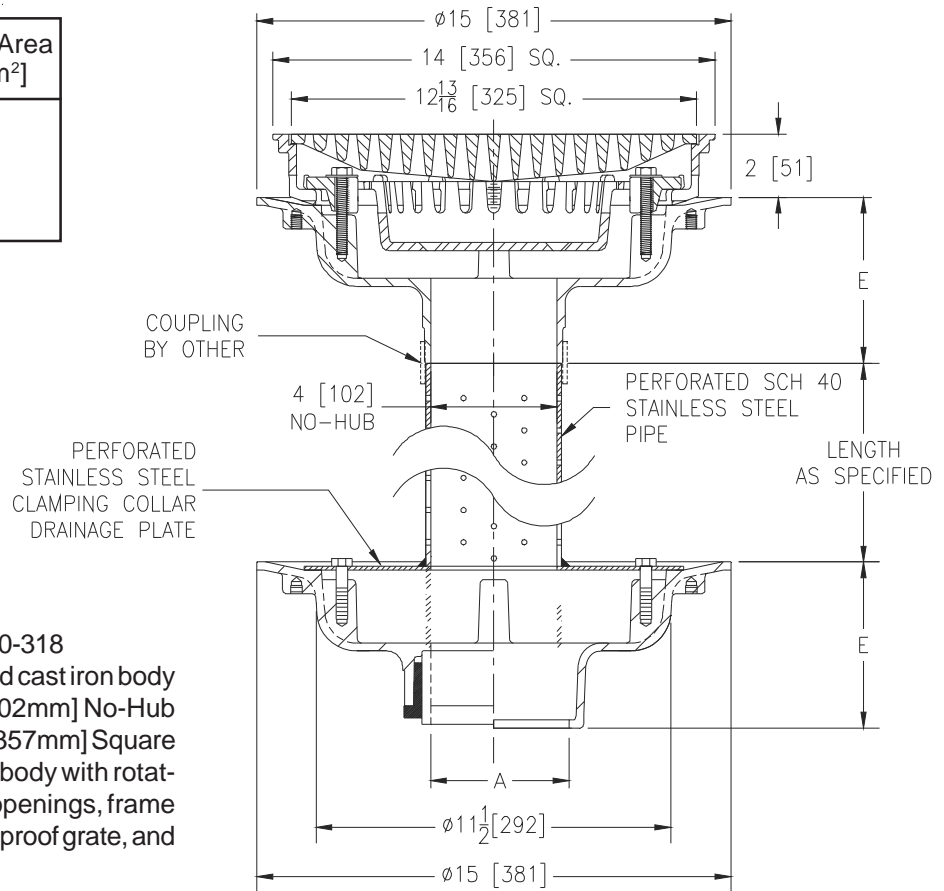

ENGINEERING SPECIFICATION: ZURN Z100-318

15" [381mm] Diameter roof drain. Dura-Coated cast iron body with stainless steel perforated plate with 4" [102mm] No-Hub Perforated Standpipe. Complete with 14 -5/8" [357mm] Square Top Prom-Deck drain, Dura-Coated cast iron body with rotatable square promenade frame with seepage openings, frame clamps, vandal-proof secured heavy-duty heel proof grate, and sediment bucket.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 2,3,4,5,6, 8 [51,76,102,127,152,203]
- 2,3,4,5,6, 8 [51,76,102,127,152,203]
- 2,3,4,5,6, 8,10 [51,76,102,127,152,203,254]
- 2,3,4 [51,76,102]

(Specify size/type) **OUTLET**

- _____ IC Inside Caulk
- _____ IP Threaded
- _____ NH No-Hub
- _____ NL Neo-Loc

E BODY HT. DIM.

- 5-1/4 [133]
- 3-3/4 [95]
- 5-1/4 [133]
- 4-5/8 [117]

PREFIXES

- _____ Z D.C.C.I. Body

SUFFIXES

- _____ -AC Angular Underdeck Clamp
- _____ -C Underdeck Clamp
- _____ -DP Top-Set® Deck Plate (Replaces both the -C and -R)
- _____ -DR Top-Set® Drain Riser
- _____ -DX Dex-o-tex Flange
- _____ -E Static extension 1 thru 4 (Specify Height)
- _____ -EA Adjustable Extension Assembly (2-1/8 thru 3-1/2)
- _____ -G Galvanized Cast Iron
- _____ -R Roof Sump Receiver
- _____ -SS Stainless Mesh Screen Over Dome
- _____ -TC Neo-Loc Test Cap Gasket (2,3,4 [51,76,102] NL Bottom Outlet Only)
- _____ -XJ Vertical Expansion Joint (See Z190)
- _____ -90 90° Threaded Side Outlet Body (2 thru 6 [51 or 152])

* Regularly furnished unless otherwise specified.