




Z1186-129 OIL INTERCEPTOR W/DRAW-OFF VALVE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

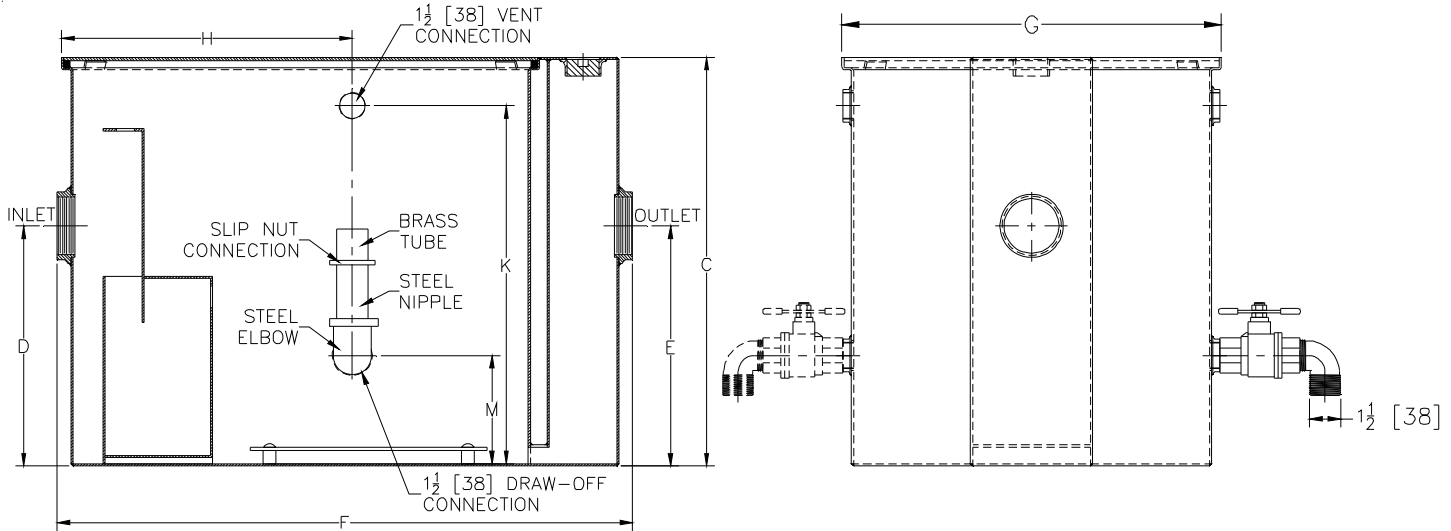

Size	Inlet/ Outlet Size **	Flow Rate GPM [L]	Water Cap. Gal. [L]	Approx. Wt.Lbs. [kg]	Dimensions In Inches						
					C	D/E	F	G	H	K	M
800	3 [76]	50 [189]	30 [113]	171 [78]	24 1/4 [616]	14 1/4 [362]	34 1/8 [867]	22 1/2 [572]	17 1/4 [438]	21 1/4 [540]	6 7/16 [164]

ENGINEERING SPECIFICATION: ZURN Z1186-129 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil draw-off with valve and vent connections either side, secured gasketed non-skid cover, complete with flow control fitting. Regularly furnished with inlet and outlet in high position. Note: Location of outlet from bottom of interceptor cannot be changed.

OPTIONS (Check/specify appropriate options)

PREFIXES

_____ Z Acid Resistant Coated Fabricated Steel*

** Inlet and outlet sizes shown indicate standard operating sizes and flow control setting. Size #800 will have 4 [102] connections reduced to 3 [76] as standard.

REV.	DATE: 10/26/09	C.N. NO. 110363
DWG. NO. P-15785 PRODUCT NO. Z1186-129		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED