




Z1185-157

SIZE 10 LINT INTERCEPTOR WITH INTEGRAL EXTENSION AND COVER RECESSED FOR 1/8 [3] THICK TILE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

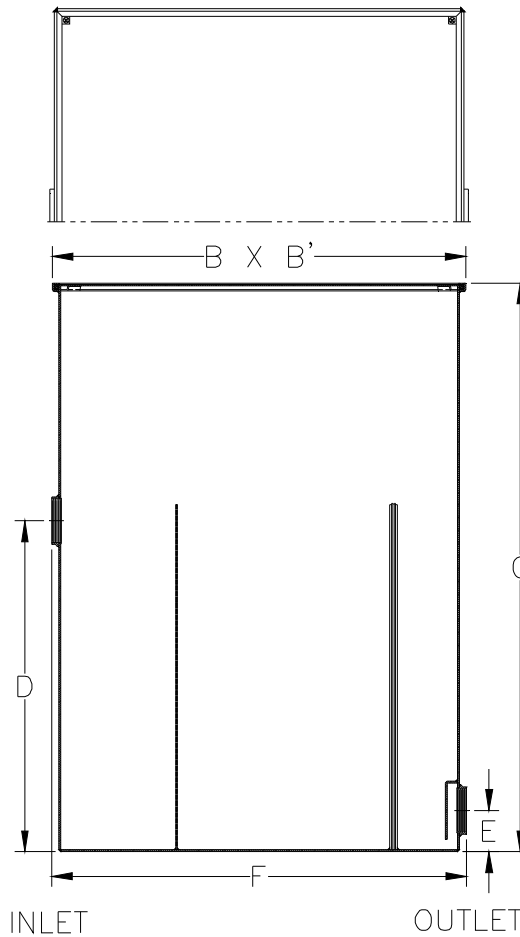

Size - No. of Machines	Inlet/Outlet Size In. [mm]	Flow Rate GPM [LPM]	Approx. Wt. Lbs. [kg]	Dimensions in Inches [mm]					
				B	B'	C	D	E	F
10	4 [102]	100 [379]	390 [177]	33 [838]	33 [838]	38 [965]	25 [635]	4 [102]	34 [864]

ENGINEERING SPECIFICATION: ZURN Z1185-157

Acid Resistant Coated interior and exterior fabricated steel lint interceptor, secured cover recessed for 1/8 [3] thick tile, with stainless lint intercepting secondary screen assembly and permanent primary straining baffle. Regularly furnished with high inlet and low outlet.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ___ Z Acid Resistant Coated Fabricated Steel*
- ___ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- ___ -RS Stainless Steel Screen Replacement Assembly

* Regularly furnished unless otherwise specified.