




Z887-6-94

Z888-6 INTO Z887 6X20 WITH HPP GRATE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

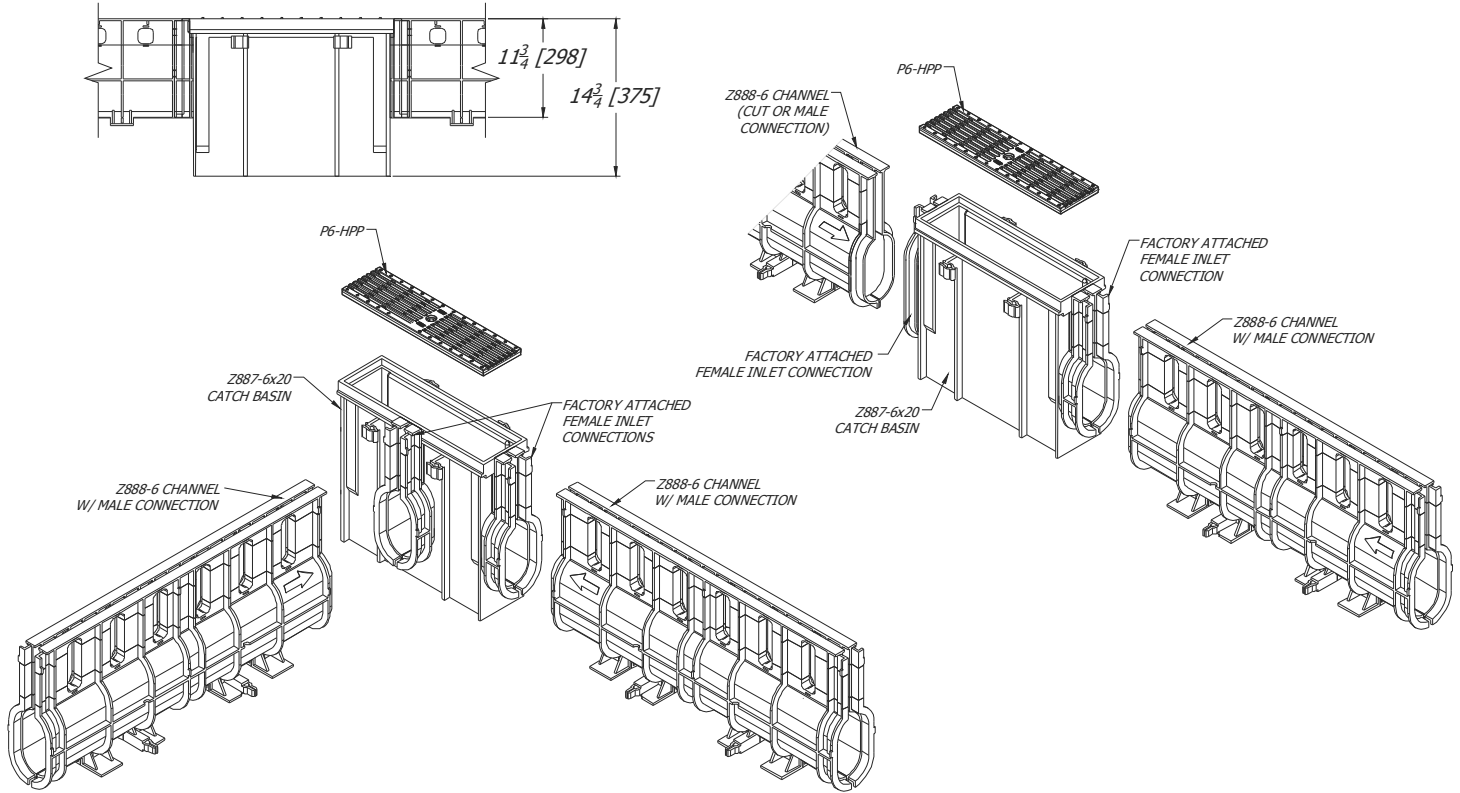

Z888-6 ENGINEERING SPECIFICATION:

Zurn Z888-6 Slot drain shall be 40" [1016mm] long, 4" [102mm] wide, and 11-3/4" [298mm] invert, with 1/2" [13mm] slot opening (ADA compliant). Drain shall be made of (HDPE) High Density Polyethylene, and is UV-10 stabilized. Drain shall have rebar clips molded onto bedding feet and/or bedding feet shall be used for positioning and anchoring purposes. Overlap connection shall be interlocked.

Z887-6 ENGINEERING SPECIFICATION:

Catch Basin shall be 6-1/4" [159mm] wide reveal x 20" [508mm] long, and 14-3/4" [375mm] deep. The body shall be made of 0% water absorbent High Density Polyethylene (HDPE). Shall mechanically lock into the concrete surround a minimum of every 10" [254mm]. Catch basin shall weigh less than 17 bs. [7.7kg] per linear foot. Catch basin shall have rebar clips standard to secure basin in its final location.

P-6 HPP GRATE ENGINEERING SPECIFICATION:

ZURN P6-HPP 20" [508mm] X 5-3/8" [137mm] High Density Polyethylene (HDPE) heel-proof slotted grate weighing .9 lbs per linear foot [1.3kg/m]. The grate has an open area of 17.4 in² per linear foot [367cm²/m]. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA compliant*, and Densetec 100 HDPE or Approved Equivalent. *Elongated openings must be placed perpendicular to the dominant direction of travel.

* Regularly furnished unless otherwise specified.