




Z-415-147 BODY ASSEMBLY

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

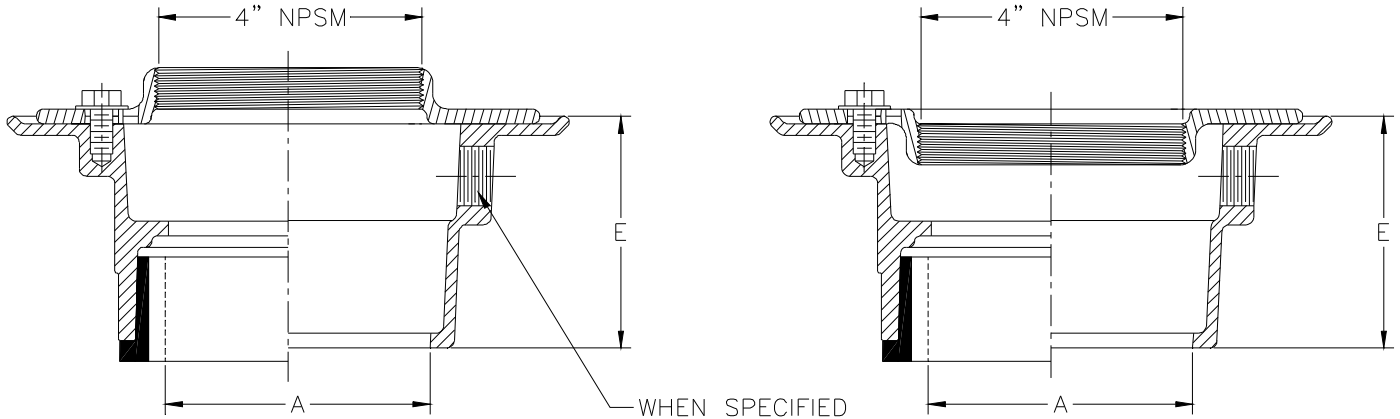

Dimensions In Inches	Approx. Wt. Lbs. [kg]
A - Pipe Size	
2-3-4 [50-75-100]	9 [4]

ENGINEERING SPECIFICATION: ZURN Z-415-147 floor and shower drain body assembly. Dura-Coated cast iron body with bottom outlet and combination invertible membrane clamp.

OPTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify size/type)	OUTLET	'E' BODY HT. DIM.
2 thru 4 [50 thru 100]	_____	IC Inside Caulk	3 7/8 [98]
2 thru 4 [50 thru 100]	_____	IP Threaded	2 5/8 [67]
2 thru 4 [50 thru 100]	_____	IG Inside Gasket	3 7/8 [98]
2 thru 4 [50 thru 100]	_____	NH No-Hub	3 7/8 [98]
2 thru 4 [50 thru 100]	_____	NL Neo-Loc	4 5/8 [117]

PREFIXES

_____ Z- D.C.C.I. Body Assembly

SUFFIXES

- _____ -AR Acid Resisting Epoxy Coated Cast Iron
- _____ -G Galvanized Cast Iron
- _____ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])
- _____ -U 3 [76] High Extension Adapter
- _____ -90 90° Threaded Side Outlet Body (2 [50], 3[75] Only)

REV.	DATE: 6/26/02	C.N. NO. 89640
DWG. NO. P-14910 PRODUCT NO. Z-415-147		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED