
SPECIFICATION SHEET

TAG



# **Z886-ST** 6-1/4 [159] WIDE REVEAL RADIUSED **TRENCH DRAIN SYSTEM**

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

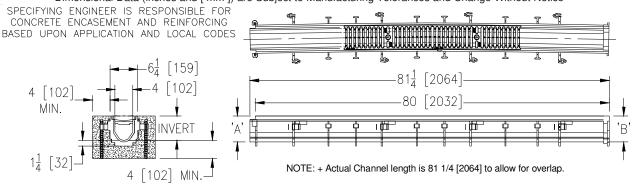

**ENGINEERING SPECIFICATION:** Zurn Z886 Channels shall be 80" [2032mm] long, 6-1/4" [159mm] wide reveal and have a 4" [102mm] throat. Channels to be made at a minimum radius of 50 ft. [15 meter] Modular channel sections shall be made of 0% water absorbent High Density Polyethylene (HDPE). Shall have a positive mechanical connection between channel sections that will not separate during the installation and shall mechanically lock into the concrete surround a minimum of every 10" [254mm]. Channels shall weigh less than 2.31 lbs.[1.05kg] per linear foot, have a smooth, 1-1/2" [38mm] radiused self cleaning bottom with a Manning's coefficient of .009 and .75% or neutral 0% built in slope. Channels shall have rebar clips standard to secure trench in its final location. Shall be provided with standard DGC grates that lock down with lockdown bars to the channel and is not intended for dynamic traffic loadings. Zurn 5-3/8" [137mm] wide reveal Ductile Iron Slotted Grate conforming to ASTM specification A536-84, Grade 80-55-06. Ductile Iron grate is rated class C per the DIN EN1433 top load classifications. Supplied in 20" [508mm] nominal lengths with 1/2" [13mm] wide slots, and 3/4" [19mm] bearing depth. Grate has an open area of 28.1 so in per ff [59,463 so mm per meter] sq. in per ft. [59,463 sq. mm per meter].

Trench

No.

8601

8602

8603

8603N

8604

'A'

Shallow Inv.

3.50 [89]

4.10 [104]

4.70 [119]

5.30 [135]

5.30 [135]

'B'

Deep Inv.

4.10 [104]

4.70 [119]

5.30 [135]

5.30 [135]

5.90 [150]

Flow

(gpm)

93

122

152

183

(lps)

6

8

10

12

13

15

-

17

19

21

23

25

27

29

31

33

(cfs)

0.21

0.27

0.34

0.41

PREFIX OPTIONS (Check/specify appropriate options) \_\_\_\_\_ Z Six-foot, Eight-inch [80mm] High Density Polyethylene (HDPE)\*

SUFFIX OPTIONS (Check/specify appropriate options)

### **Outlet Adapters Add/Each**

-E1	Closed End Cap	-U2	2 [51] No-Hub Bottom Outlet
-E2	2 [51] No-Hub End Outlet	-U3	3 [76] No-Hub Bottom Outlet
-E3	3 [76] No-Hub End Outlet	-U4	4 [102] No-Hub Bottom Outlet
-E4	4 [102] No-Hub End Outlet	-U6	6 [152] No-Hub Bottom Outlet
-E6	6 [152] No-Hub End Outlet		

-E6 6 [152] No-Hub End Outlet	0004	0.00[100]	0.00[100]	0.71	100	
	8605	5.90 [150]	6.50 [165]	0.48	214	1
Grate Options (Load Classifications are per DIN EN1433)	8606	6.50 [165]	7.10 [180]	0.55	245	1
BDC Black Acid Resistant Epoxy Coated Ductile Grate - Class C	8606N	J 7.10 [180]	7.10 [180]	-	-	
-BG Galvanized Ductile Iron Bar Grate - Class C -DBG Ductile Iron Cast Bar Grate - Class C	8607		7.70 [196]	0.62	276	1
-DC Ductile Iron Solid Cover - Class C	8608	7.70 [196]	8.30 [211]	0.69	308	1
-DGC Ductile Iron Slotted Grate - Class C *	8609		8.90 [226]	0.76	339	2
	8610			0.83	371	-7
-GDC Galvanized Ductile Slotted Grate - Class C -GG Fiberglass Grate - Class A -GHPD Galvanized Heel-Proof Ductile Grate - Class B	8611		10.10 [257]	0.90	403	
	8612		10.70 [272]	0.97	435	
-HPP Heel-Proof Polyethylene Grate - Class A	8612		10.70 [272]	-		
-LD Ductile Iron Longitudinal Slotted Grate - Class B	8613		11.30 [287]	1.04	467	-
-RFG Reinforced Galvanized Steel Slotted Grate - Class B	8614		11.90 [302]	1.11	498	- 2
-RPG Reinforced Galvanized Perforated Grate - Class B	8615		12.50 [318]	1.11	530	_
-RFGC Reinforced Slotted Galvanized Grate - Class C	0010	11.90 [302]	12.50 [516]	1.10	550	
-RPGR Reinforced Perforated Reverse Punch Galvanized Grate - Class B	MADE in the U.S.A.	(Load Classificatio	ons are per DIN El	V1433)		
-RPGRC Reinforced Perforated Galvanized Reverse Punch Grate - Class C	AWG		e Grate - Class A			
-RPSC Reinforced Perforated Stainless Steel Grate - Class C	DGC-USA		lotted Grate - Cla			
-RPSRC Reinforced Perforated Stainless Steel Reverse Punch Grate - Class C	FG -FS		alvanized Steel S ainless Steel Slot			
Miscellaneous Options	-GDC-USA		uctile Slotted Gra			
-VP Vandal-Proof Lockdown	-GG	Fiberglass Gra			0	
-JC Joint Connector	-PG		Ivanized Steel G			
	-PGR		ated Galvanized		te - Class I	4
Decorative Grate Options (Load Classifications are per DIN EN1433)	PPC -PS		ated Grate - Clas ainless Steel Gra		۵	
BCD Bronze Circular Decorative Grate - Class A Bronze Diagonal Decorative Grate - Class A	SC		el Cover- Class A		7	
-DCD Ductile Iron Circular Decorative Grate - Class C	00					
DDD Ductile Iron Diagonal Decorative Grate - Class A	USA Miscellaneous C					
-DOG Ductile Iron Decorative Grate - Class A	DB	Bottom Dome	Strainer			

SA MISCElla leous O	puons		
-DB	Bottom	Dome S	Strainer

## Decorative MADE in the U.S.A. (Load Classifications are per DIN EN1433)

	Bronze Decorative Grate - Class A Nickel Bronze Decorative Grate - Class A Perforated Stainless Steel Raised Grate - Class A Stainless Steel Wire Grate - Class A
500	Stairliess Steel Wile Grate - Glass A

Zurn Industries, LLC | Specification Drainage Operation 1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929

#### In Canada | Zurn Indust ries Limited

3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292

Ductile Iron Tidal Wave Decorative Grate - Class C Ductile Wave Decorative Grate - Class A Galvanized Steel Mesh Grate - Class A

Heel-Proof Stainless Steel Slotted Grate - Class A

Stainless Steel Circular Decorative Grate - Class B Stainless Steel Diagonal Decorative Grate - Class B

Heel-Proof Bronze Slotted Grate - Class A

Stainless Steel Steel Mesh Grate - Class A

Stainless Steel Decorative Grate - Class B

#### www.zurn.com

-DTW

-DWV -GMG -HPB

-HPS

SCD

SDD

-SMG

-SOG

\* Regularly furnished unless otherwise specified.

.1 Rev. Date: 01/26/17 C.N. No. 136165 Prod. | Dwg. No. Z886-ST