


## Z-1186-102 OIL INTERCEPTOR WITH INTEGRAL STORAGE TANK

**SPECIFICATION SHEET** 

TAG

Dimensional Data (inches or I mm 1) are Subject to Manufacturing Tolerances and Change Without Notice

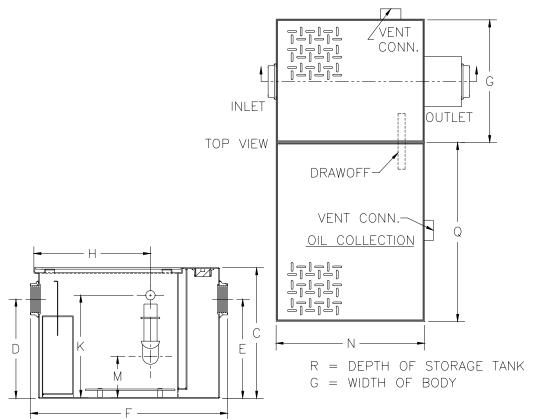

Size	Inlet/Outlet Size**	Flow Rate G.P.M.	Storage Tank Cap. Gal.[I]	Approx. Wt. Lbs.[kg]	Dimensions In Inches									
					С	D/E	F	G	Н	K	М	N	Q	R
400	2 [51]	25	25 [95]	190 [86]	14 [356]	8 1/4 [210]	22 3/4 [578]	14 1/8 [359]	11 5/8 [295]	11 [279]	4 7/16 [113]	17 [432]	25 [635]	25 [635]

**ENGINEERING SPECIFICATION**: ZURN Z-1186-102 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, oil drawoff, vent connections, secured gasketed non-skid cover, complete with flow control fitting and integral storage tank. Regularly furnished with inlet and outlet in high position. Note: location of outlet from bottom of interceptor cannot be changed.

**OPTIONS** (Check/specify appropriate options)

## **PREFIXES**

\_\_\_\_ Z- Acid Resistant Coated Fabricated Steel\*

## **SUFFIXES**

**E** Acid Resistant Coated interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.

**K** Anchor flange 1 3/4 [44] down from top and 2 [51] wide. A 3 [76] minimum extension height required when anchor flange (-K) option is specified.

**-KC** Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.

\*\* Inlet and outlet sizes shown indicate standard operating sizes and flow control settings. Size #400 will have 3 [76] connections reduced to 2 [51] as standard. If changed, flow control must be adjusted accordingly.

REV. DATE: 2/5/99 C.N. NO. 82131

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

DWG. NO. P-14691 PRODUCT NO. Z-1186-102