
## **GREASE INTERCEPTOR**

OW CONTROL ACCESS BOX FOR RECESSING RECEIVER TAG

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

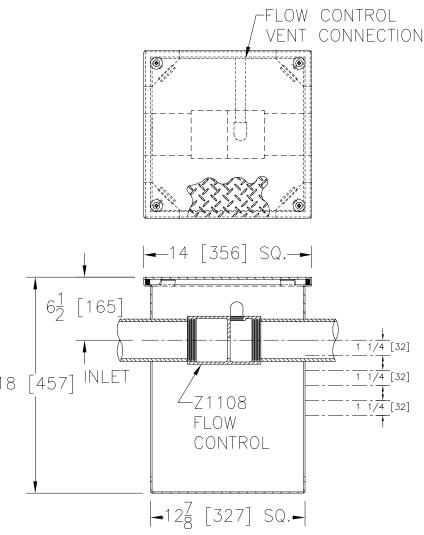

ENGINEERING SPECIFICATION: ZURN Z1108-80 Acid Resistant Coated interior and exterior fabricated steel access box with slotted openings for use with Z1170-600 grease interceptor recessing receiver, complete with gasketed non-skid secured cover.

## **PREFIXES**

Inlet/

Outlet Size

4[102]

Approx.

Wt. Lbs.

[kg]

50[23]

Acid Resistant Coated Fabricated Steel\*

## **SUFFIXES**

Acid Resistant Coated Interior and exterior fabricated steel integral extension section. -E (Specify 'C' Dim. required) for recessed installation.

-K Anchor flange 1 3/4 [44] down from top and 2 [51] wide.

Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar. -KC

> DATE: 4/24/08 REV.

C.N. NO. 98396

DWG. NO. P-15542 PRODUCT NO. Z1108-80

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED