



Z415N-82


BODY ASSEMBLY

W/ "TYPE N" ROUND STRAINER RATED FOR 10,000 lb [4536 kg] WHEEL LOAD

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

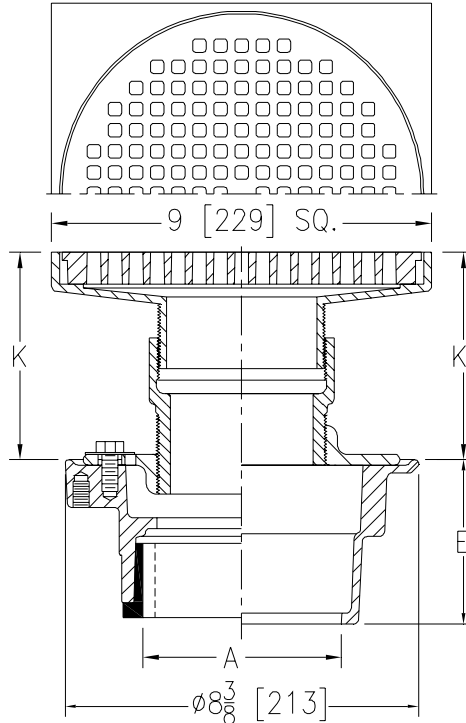

Dimensions In Inches					Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm ²]
A - Pipe Size	K		K'			
	Min.	Max.	Min.	Max.		
2-3-4-6 [51-76-102-152]	3 7/16 [87]	5 3/8 [137]	4 1/8 [105]	6 [152]	25 [11]	17 [110]

ENGINEERING SPECIFICATION: ZURN Z415N-82 Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp with seepage slots, adjustable extension and square adjustable collar with "Type N" acid resistant epoxy coated ductile iron strainer with UV inhibitor (specify color). Loose-set heel-proof grate is rated for 10,000 lb [4536 kg] wheel load.

OPTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify size/type) OUTLET	'E' BODY HT. DIM.
2 thru 4 [51 thru 102]	_____ IC Inside Caulk	3 7/8 [98]
2 thru 4 [51 thru 102]	_____ IG Inside Gasket	3 7/8 [98]
2 [51]	_____ IP Threaded	2 3/8 [60]
3 [76]	_____ IP Threaded	2 5/8 [67]
4 [102]	_____ IP Threaded	2 7/8 [73]
6 [152]	_____ IP Threaded	2 3/4 [70]
2 thru 4 [51 thru 102]	_____ NH No-Hub	3 7/8 [98]
2 thru 4 [51 thru 102]	_____ NL Neo-Loc	3 3/4 [95]

PREFIXES

- _____ Z D.C.C.I. Body Assembly w/ Epoxy Coated Ductile Iron Top*
- _____ ZS D.C.C.I. Body Assembly w/ Stainless Steel Top

SUFFIXES

- | | |
|---|--|
| _____ -AR Acid Resisting Epoxy Coated Cast Iron | _____ -VP Vandal-Proof Secured Top |
| _____ -G Galvanized Cast Iron | _____ -Y Sediment Bucket |
| _____ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19]) | _____ -90 90° Threaded Side Outlet Body Assembly (2 [51], 3 [76] Only) |
| _____ -SR Stabilizer Ring | |
| _____ -TC Neo-Loc Test Cap Gasket (2 [51] - 4 [102] NL Outlet Only) | |
| _____ -TS Top Secured with Slotted Screws | |
| _____ -U 1 - 3 [25 - 76] High Extension Adapter | |
| _____ -V Backwater Valve | |

REV.	DATE: 06/21/06	C.N. NO. 95244
DWG. NO. P-15301 PRODUCT NO. Z415N-82		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED