


Z1186-ST-92 OIL INTERCEPTOR W/ 400 GALLON INTEGRAL STORAGE TANK

SPECIFICATION SHEET

TAG ____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

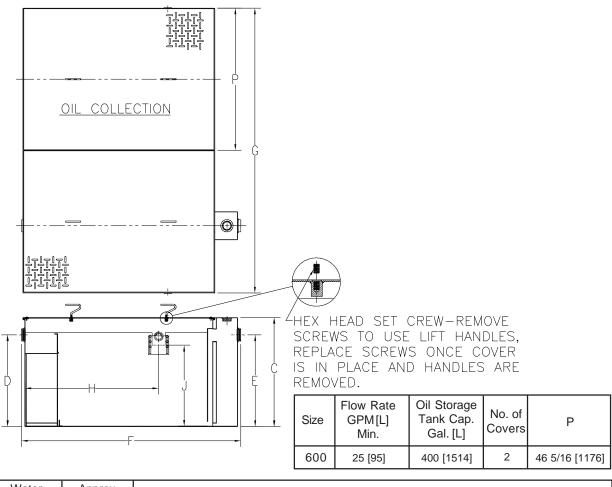

Flow Rate GPM[L] Min	Inlet/ outlet Size	Water Capacity Gal. [L]	Approx. Wt. Lbs. [kg.]	Dimensions in Inches					
				С	D/E	F	Ð	Н	J
25 [95]	3 [76]	333 [1261]	1950 [885]	35 1/2 [901]	29 3/8 [746]	71 3/8 [1813]	92 3/4 [2356]	43 1/2 [1105]	26 3/8 [670]

ENGINEERING SPECIFICATION: ZURN Z1188-ST-92

Acid Resistant Coated interior and exterior fabricated steel oil interceptor with 400 gallon integral storage tank, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, oil draw-off, vent connections, secured gasketed non-skid cover, complete with flow control fitting and left hand integral storage tank. Regularly furnished with inlet and outlet in high position. Note: location of outlet from bottom of interceptor cannot be changed.

OPTIONS (Check/specify appropriate options)

PREFIXES ___ Z Acid Resistant Coated Fabricated Steel* SUFFIXES ___ -E Integral Acid Resistant Coated interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation. __ -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide. A 3 [76] minimum extension height is required when anchor flange (-K) option is specified. (Specify 'C' Dim. height required.) __ -KC Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar. __ -STR Storage tank on right hand side when facing the inlet.

REV. DATE: 02/08/08 C.N. NO. 98086
DWG NO. P-15516 PRODUCTNO.Z1186-ST-92