




Z451-158

EXTRA SHALLOW TRAP DRAIN W/ "TYPE B" STRAINER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

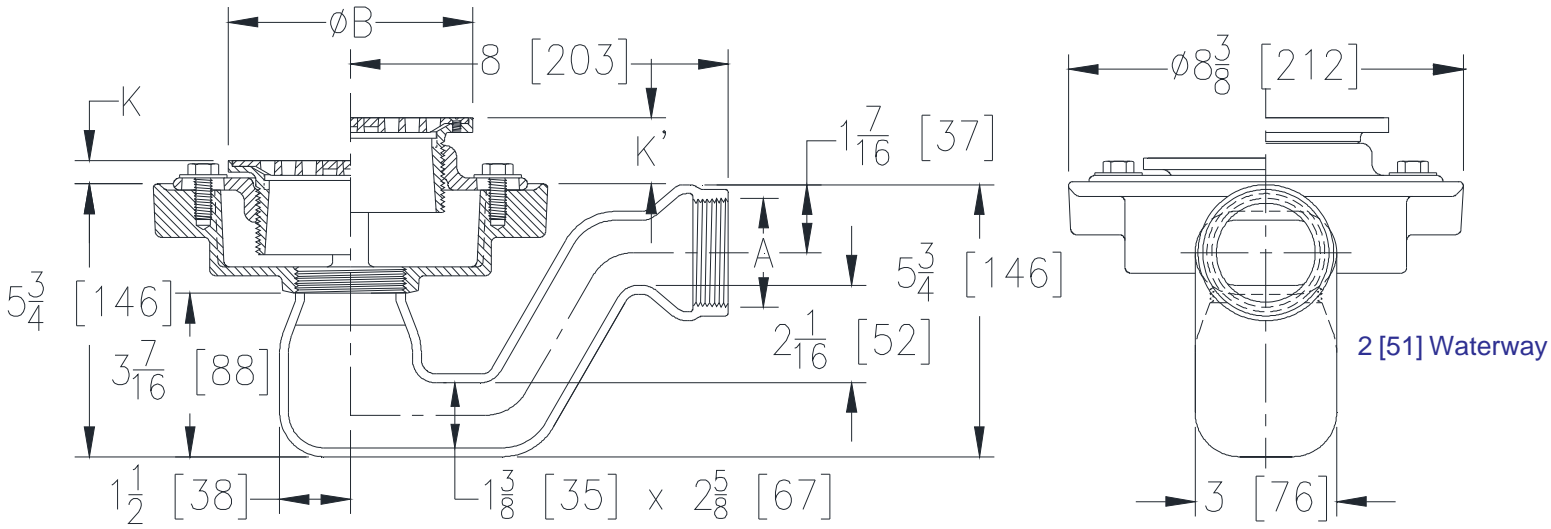

Dimensions in In [mm]						Approx. Wt. lbs [kg]	Strainer Open Area In ² [cm ²]
A Pipe Size	Strainer Dia.	K		K'			
		Min	Max	Min	Max		
2 [51]	5 [127]	1 [25]	1-1/2 [38]	1-3/32 [28]	2-1/4 [27]	15 [7]	8 [52]
2 [51]	6 [152]	1 [25]	1-25/32 [45]	1-13/32 [36]	2-17/32 [64]	18 [8]	9 [58]
2 [51]	7 [178]	1 [25]	2-1/8 [54]	1-23/32 [44]	2-7/8 [73]	20 [9]	12 [77]

ENGINEERING SPECIFICATION:
 ZURN ZN451-158
 Extra shallow trap floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with seepage slots, adjustable "TYPE B" polished, nickel bronze heel-proof strainer and cast iron shallow trap body with 2" [51mm] waterway and threaded side outlet.

OPTIONS (Check/specify appropriate options)

PIPE SIZE 2 [51] (Specify size) **OUTLET** _____ IP Threaded

PREFIXES
 _____ ZB D.C.C.I. Body Assembly w/ Polished Bronze Top
 _____ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top*

SUFFIXES
 _____ -AR Acid Resisting Epoxy Coated Cast Iron
 _____ -CP Chrome-Plated Bronze Top
 _____ -DP Decorative Polished Top
 _____ -G Galvanized Cast Iron
 _____ -HD Heavy-Duty Slotted Grate (ZN only)
 _____ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])
 _____ -PC Protective Cover
 _____ -U 1-3 [25-76] High Extension Adapter
 _____ -V Backwater Valve
 _____ -VP Vandal-Proof Secured Top
 _____ -Y Sediment Bucket
 _____ -18 Leveling Ring (See Z400-18)

* Regularly furnished unless otherwise specified.