


Z1172-113 LARGE CAPACITY GREASE INTERCEPTOR

SPECIFICATION SHEET TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

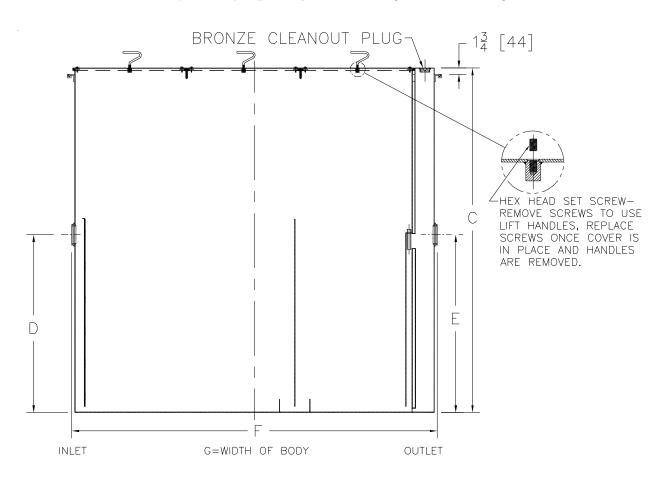

Γ	Size	Inlet/ Outlet Size**	Flow Rate	Capacity			Approx.	Dimensions in Inches			
1			G.P.M.	Water	Grease	of ver	Wt. Lbs.				
1			[L]	Gal. [L]	Lbs. [kg]	ဗိ ပိ	[kg]	С	D/E	F	G
	1800	6 [152]	450 [1701]	1280 [4838]	900 [409]	3	2710 [1230]	94 1/4 [2394]	48 5/8 [1235]	100 [2540]	72 [1829]

ENGINEERING SPECIFICATION: ZURN Z1172-113

Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at ____ GPM and ____ Lbs. grease capacity with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle, anchor flange and clamping collar, three (3) gasketed heavy duty non-skid secured covers with removable lift handles, complete with flow control fitting. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)								
PREFIXES								
Z	Acid Resistant Coated Fabricated Stee							

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. B DATE: 08/03/07 C.N. NO. 97081 DWG. NO. P-14782 PRODUCT NO. Z1172-113

ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514