




# Z415G-77

## BODY ASSEMBLY W/ "TYPE G" STRAINER & EXTENSION

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

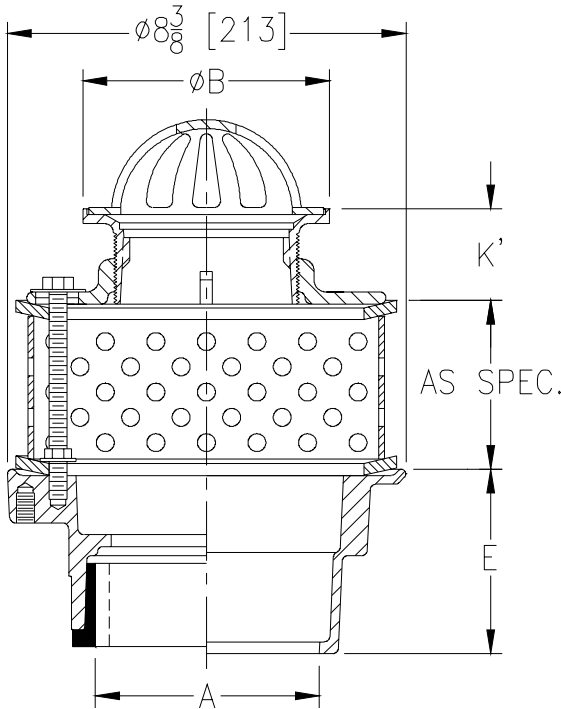

| Dimensions In Inches |                 |            |            | Approx. Wt. Lbs. [kg] | Strainer Open Area Sq. In. [cm <sup>2</sup> ] |
|----------------------|-----------------|------------|------------|-----------------------|---|
| A - Pipe Size        | B Strainer Dia. | K'         |            |                       |   |
|                      |                 | Min.       | Max.       |                       |   |
| 2-3 [50-75]          | 5 [127]         | 1 3/8 [35] | 2 3/8 [60] | 11 [5]                | 10 [65]                                       |
| 2-3-4 [50-75-100]    | 6 [152]         | 1 5/8 [41] | 2 3/4 [70] | 13 [6]                | 12 [77]                                       |

**ENGINEERING SPECIFICATION:** ZURN ZN415G-77 Floor and shower drain, Dura-Coated cast iron body with bottom outlet, flat clamping collar, stainless steel perforated extension, secondary clamping collar, combination invertible membrane clamp and adjustable collar with "TYPE G" polished nickel bronze strainer with dome grate

**OPTIONS** (Check/specify appropriate options)

**PIPE SIZE**

- 2 thru 4 [51 thru 102]
- 2 thru 4 [51 thru 102]
- 2 [51]
- 3 [76]
- 4 [102]
- 6 [152]
- 2 thru 4 [51 thru 102]
- 2 thru 4 [51 thru 102]

(Specify size/type) **OUTLET**

- \_\_\_\_\_ IC Inside Caulk
- \_\_\_\_\_ IG Inside Gasket
- \_\_\_\_\_ IP Threaded
- \_\_\_\_\_ IP Threaded
- \_\_\_\_\_ IP Threaded
- \_\_\_\_\_ IP Threaded
- \_\_\_\_\_ NH No-Hub
- \_\_\_\_\_ NL Neo-Loc

**'E' BODY HT. DIM.**

- 3 7/8 [98]
- 3 7/8 [98]
- 2 3/8 [60]
- 2 5/8 [67]
- 2 7/8 [73]
- 2 3/4 [70]
- 3 7/8 [98]
- 4 5/8 [117]

**PREFIXES**

- \_\_\_\_\_ ZB D.C.C.I. Body Assembly w/Polished Bronze Top
- \_\_\_\_\_ ZN D.C.C.I. Body Assembly w/Polished Nickel Bronze Top\*

**SUFFIXES**

- \_\_\_\_\_ -AR Acid Resisting Epoxy Coated Cast Iron
- \_\_\_\_\_ -BS Bronze Mesh Screen Over Dome
- \_\_\_\_\_ -CP Chrome-Plated Bronze Top
- \_\_\_\_\_ -G Galvanized Cast Iron
- \_\_\_\_\_ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])
- \_\_\_\_\_ -SS Stainless Steel Mesh Screen Over Dome
- \_\_\_\_\_ -TC Neo-Loc Test Cap Gasket (2 [50] - 4 [100] NL Outlet Only)
- \_\_\_\_\_ -V Backwater Valve
- \_\_\_\_\_ -VP Vandal-Proof Secured Top

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

|                         |                      |                             |
|-------------------------|----------------------|-----------------------------|
| <b>REV.</b>             | <b>DATE:</b> 7/12/04 | <b>C.N. NO.</b> 92352       |
| <b>DWG. NO.</b> P-15071 |                      | <b>PRODUCT NO.</b> Z415G-77 |

ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292