




Z1188-ST-78

SPECIFICATION SHEET

LARGE CAPACITY HEAVY-DUTY OIL INTERCEPTOR W/ INTEGRAL STORAGE TANK & 2200 GAL. WATER CAPACITY

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

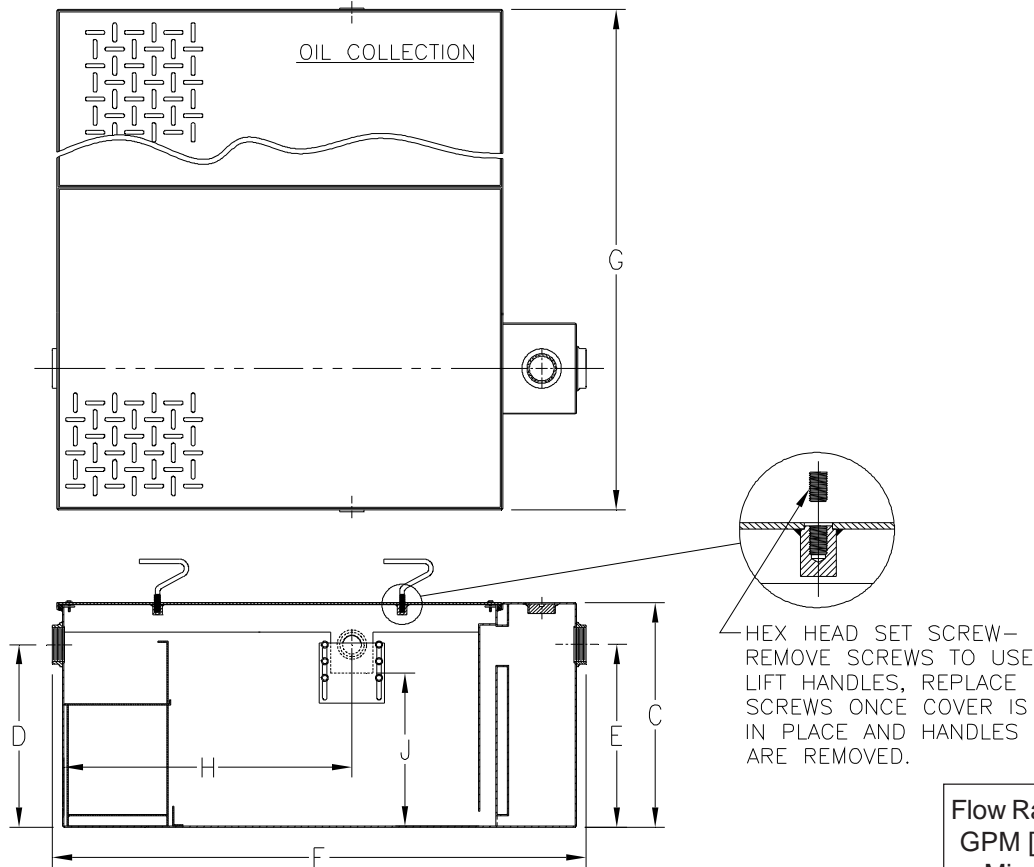

Flow Rate GPM [L] Min.	Oil Storage Tank Cap. Gal. [L]	No. of Covers	
		Trap	Tank
500 [1893]	700 [2650]	2	2

Flow Rate GPM [L] Min.	Inlet/ Outlet Size**	Water Capacity Gal. [L]	Approx. Wt. Lbs. [kg]	Dimensions in Inches					
				C	D/E	F	G	H	J
500 [1893]	6 [152]	2200 [8328]	6700 [3039]	88 5/8 [2251]	64 5/8 [1641]	124 1/8 [3153]	97 7/8 [2486]	73 15/16 [1878]	61 1/8 [1552]

ENGINEERING SPECIFICATION: ZURN Z1188-ST-78 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, oil draw-off and vent connections complete with secured gasketed non-skid heavy-duty traffic cover rated at 10,000 lb. [4536 kg] maximum safe live load with removable lift handles, flow control fitting, integral extension and left hand integral storage tank. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

___ -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide. (Specify 'C' Dim. height required.)

___ -KC Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.

___ -STR Storage tank on right hand side when facing the inlet.

REV.	DATE: 10/30/07	C.N. NO. 97382
DWG. NO. P-15484 PRODUCT NO. Z1188-ST-78		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED