



ZN415-BF-FS


BODY ASSEMBLY WITH "TYPE BF" STRAINER FOR FLOATING SLAB

SPECIFICATION SHEET

TAG _____



Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

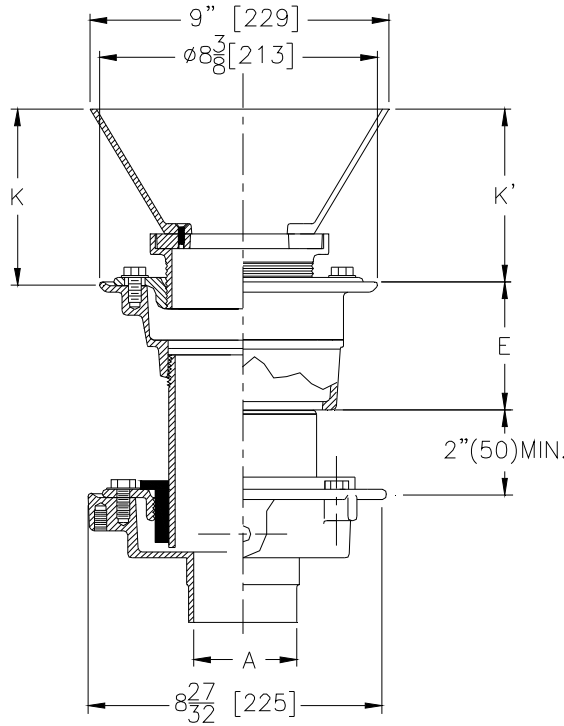

Str. Desig.	Dimensions In Inches / [mm]					Approx. Wt. Lbs. / (kg)	Strainer Open Area Sq. In. / [sq cm]
	A Pipe Size	K		K'			
		Min.	Max.	Min.	Max.		
-A5	2-3-4-6 [51-76-102-152]	9 [229]	5-3/8 [137]	4-5/8 [117]	6 [152]	19 [9]	13 [84]

ENGINEERING SPECIFICATION: ZURN ZN415-BF-FS
 Floor and Shower Drain, Dura-Coated cast iron upper and lower bodies, combination invertible membrane clamps and adjustable collars with "Type BF" round adjustable strainer with nickel bronze open throat and funnel. Floating slab drain features cast iron sleeve and watertight gasket.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 2,3,4 [51,76,102]
- 2,3,4 [51,76,102]
- 2,3,4,6 [51,76,102,152]
- 2,3,4 [51,76,102]
- 2,3,4 [51,76,102]

(Specify size/type) **OUTLET**

- _____ IC Inside Caulk
- _____ IG Inside Gasket
- _____ IP Threaded
- _____ NH No-Hub
- _____ NL Neo-Loc

E BODY HT. DIM.

- 3-7/8 [98]
- 3-7/8 [98]
- 2-5/8 [67]
- 3-7/8 [98]
- 4-5/8 [117]

SUFFIXES

- | | |
|---|---|
| <ul style="list-style-type: none"> _____ -AR Acid Resistant Epoxy Coated Cast Iron _____ -A6 6 [152] Nickel Bronze Strainer (ZNX only) _____ -G Galvanized Cast Iron _____ -P 1/2 [13] Trap Primer Connection (Lower body) _____ -U 1 [25] - 3 [76mm] High Extension Adapter | <ul style="list-style-type: none"> _____ -VP Vandal-Proof Secured Top _____ -X Squeezin Backwater Valve _____ -Y Sediment Bucket _____ -414 4 [102] Diameter Cast Iron Funnel _____ -6NH 6 [152] No-Hub Outlet (6IP with Z1040) |
|---|---|

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. DATE: 02/22/13 C.N. NO. 128848

DWG. NO. 310549 PRODUCT NO. ZN415-BF-FS