




Z1173-TD-83

GREASE INTERCEPTOR WITH GREASE ACCUMULATING CONE AND INLINE SHUTOFF VALVE, AND ENCLOSED RECESSING RECEIVER (NON-ADJUSTABLE)

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

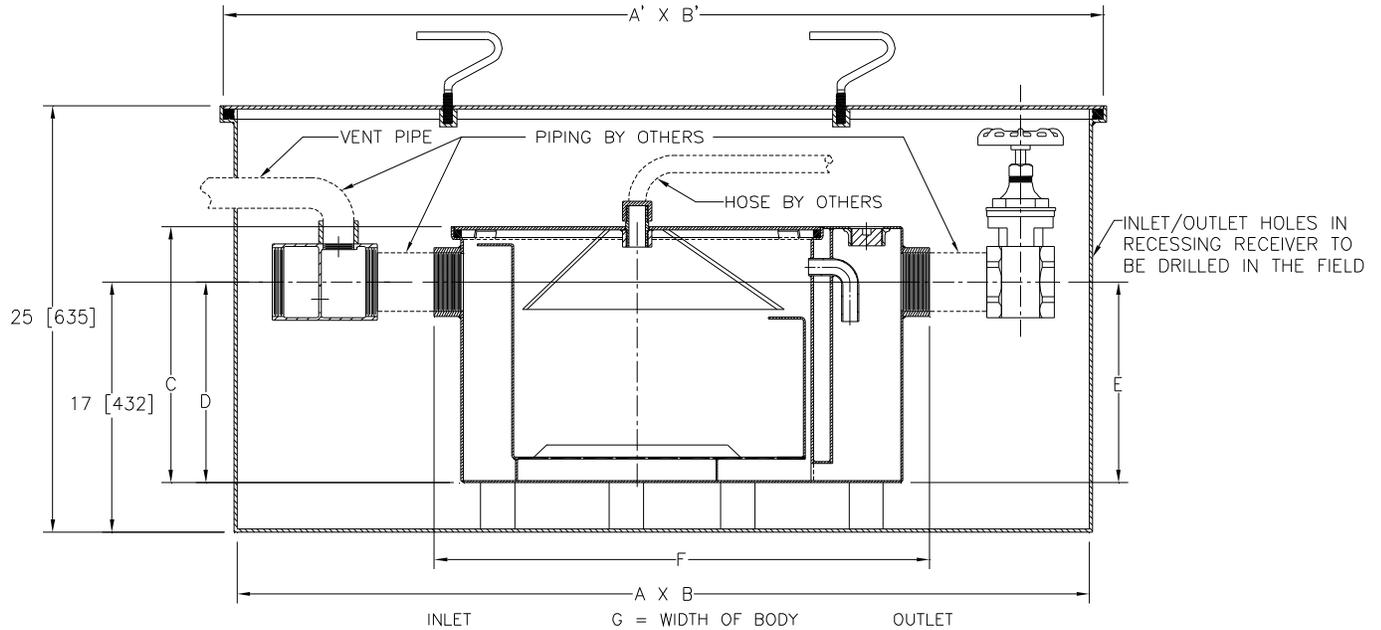

Size	Inlet/Outlet Size**	Flow Rate G.P.M. [L]	Capacity		Approx. Wt. Lbs. [kg]
			Water Gal. [L]	Grease Lbs. [kg]	
800	4[102]	50 [189]	40 [151]	100 [45]	186 [84]

Dimensions in Inches [mm]							
A	A'	B	B'	C	D/E	F	G
54-1/4 [1378]	56-1/4 [1429]	28 [711]	30 [762]	21-1/2 [546]	16 [406]	36 [914]	24-1/2 [622]

ENGINEERING SPECIFICATION: ZURN Z1173-TD-83 Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at ___ GPM and ___ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable combination pressure equalizing/flow diffusing baffle and sediment tray. Gasketed non-skid secured cover with draw off port having bronze pipe nipple and cap, grease accumulating cone, in line closure valve, Z1108 Flow Control Fitting, and fabricated steel non-adjustable recessing receiver with gasketed non-skid cover and removeable lift handles. Regularly furnished with inlet and outlet in high position. Note: Location of outlet from bottom of interceptor cannot be changed.

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

___ -E Acid Resistant Coated interior and exterior fabricated steel extension for recessing receiver.

+ Closure valve must be oriented at an angle to avoid interference with recessing receiver.

REV.	DATE: 5/7/09	C.N. NO. 99969
DWG. NO. P-15709		PRODUCT NO. Z1173-TD-83

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED