




Z415BL-76

BODY ASSEMBLY W/ "TYPE BL" STRAINER AND GASKETED COVER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

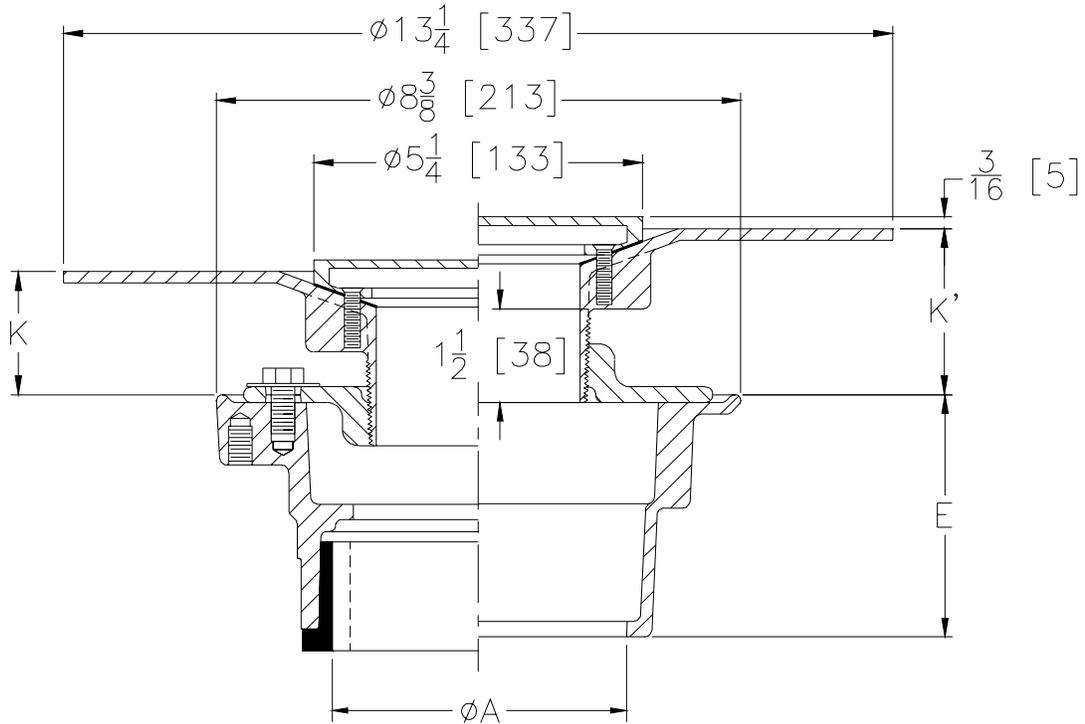

Dimensions In Inches				Approx. Wt. Lbs. [Kg.]	Strainer Open Area Sq. In. [cm ²]	
A - Pipe Size	K		K'			
	Min.	Max.	Min.	Max.		
2-3-4-6 [51-76-102-152]	1 3/8 [35]	2 3/8 [60]	2 1/4 [57]	3 3/8 [86]	18 [8]	7 [45]

ENGINEERING SPECIFICATION: ZURN ZN415BL-76
Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with "Type BL" D.C.C.I. wide flanged head and polished nickel bronze gasketed cover.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 2 thru 4 [51 thru 102]
- 2 [51]
- 3 [76]
- 4 [102]
- 6 [152]
- 2 thru 4 [51 thru 102]
- 2 thru 4 [51 thru 102]

(Specify type/size) **OUTLET**

- _____ **IC** Inside Caulk
- _____ **IP** Threaded
- _____ **IP** Threaded
- _____ **IP** Threaded
- _____ **IP** Threaded
- _____ **NH** No-Hub
- _____ **NL** Neo-Loc

'E' BODY HT. DIMENSION

- 3 7/8 [98]
- 2 3/8 [60]
- 2 5/8 [66]
- 2 7/8 [73]
- 2 3/4 [69]
- 3 7/8 [98]
- 4 5/8 [117]

PREFIXES

- _____ **ZB** D.C.C.I. Body Assembly with Polished Bronze Top
- _____ **ZN** D.C.C.I. Body Assembly with Polished Nickel Bronze Top*

SUFFIXES

- _____ **-AR** Acid Resisting Epoxy Coated Cast Iron
- _____ **-CP** Chrome-Plated Bronze Top
- _____ **-G** Galvanized Cast Iron
- _____ **-P** Primer Connection (Specify 1/2 [13] or 3/4 [19])
- _____ **-SH** Four (4) Securing Holes
- _____ **-TC** Neo-Loc Test Cap Gasket (2 - 4 [51 -102] NL Bottom Outlet Only)
- _____ **-J** 1 - 3 [25 - 76] High Extension Adapter
- _____ **-VP** Vandal-Proof Secured Top
- _____ **-Y** Sediment Bucket
- _____ **-90** 90° Side Outlet Body (2 [51], 3 [76] only)

REV. A	DATE: 03/24/04	C.N. NO. 92056
DWG. NO. P-13896	PRODUCT NO. Z415BL-76	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED