


## **Z1170-ER-R** ADJUSTABLE RECESSING RECEIVER FOR GREASE INTERCEPTOR W/6[152] RETROFIT EXTENSION

TAG

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

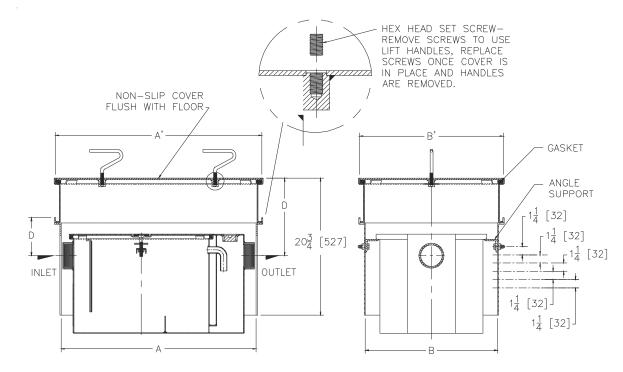

Dimensions in Inches [mm]					
Size	A	A'	В	Β'	D
100	20-1/8 [511]	21-5/8 [549]	12-3/4 [324]	14-5/8 [371]	10-3/4 [273]
200	22-1/8 [562]	23-5/8 [600]	15-3/8 [391]	17-1/4 [438]	11 [279]
300	25-3/8 [645]	26-7/8 [683]	17-1/2 [445]	19-3/8 [492]	11-1/2 [292]
400	32 [813]	33-1/2 [851]	20 [508]	21-7/8 [556]	12 [305]
500	29-13/16 [757]	31-5/16 [795]	20-3/4 [527]	22-5/8 [575]	11-1/4 [286]
600	34-3/8 [873]	35-7/8 [911]	23-1/4 [590]	25-1/8 [638]	12-9/16[319]
700	35-3/8 [898]	35-7/8 [911]	26 [660]	27-7/8 [780]	12-9/16 [319]
800	37-5/8 [956]	39-1/8 [994]	28 [711]	29-7/8 [759]	12-1/2 [318]

## ENGINEERING SPECIFICATION:

ZURNZ1170-ER-R Acid Resistant Epoxy Coated Recessing receiver equipped with adjustable support brackets and gasketed 6" [152mm] retrofit extension cover with removable lift handles. Complete with Z1170 Grease Interceptor with gasketed non-skid cover. (For interceptor specifications see Z1170 specification sheet.)

## PREFIXES

Z Acid Resistant Coated Fabricated Steel\*

## SUFFIXES

- - -T Cover recessed for tile/terrazzo. A 3 [76] minimum extension height is required. (Specify required recess depth 1/8 [3], 3/4 [19], or 1-1/4 [32]).

\* Regularly furnished unless otherwise specified.