




Z415J-76

BODY ASSEMBLY W/ "TYPE J" HEEL-PROOF STRAINER AND DEX-O-TEX FLANGE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

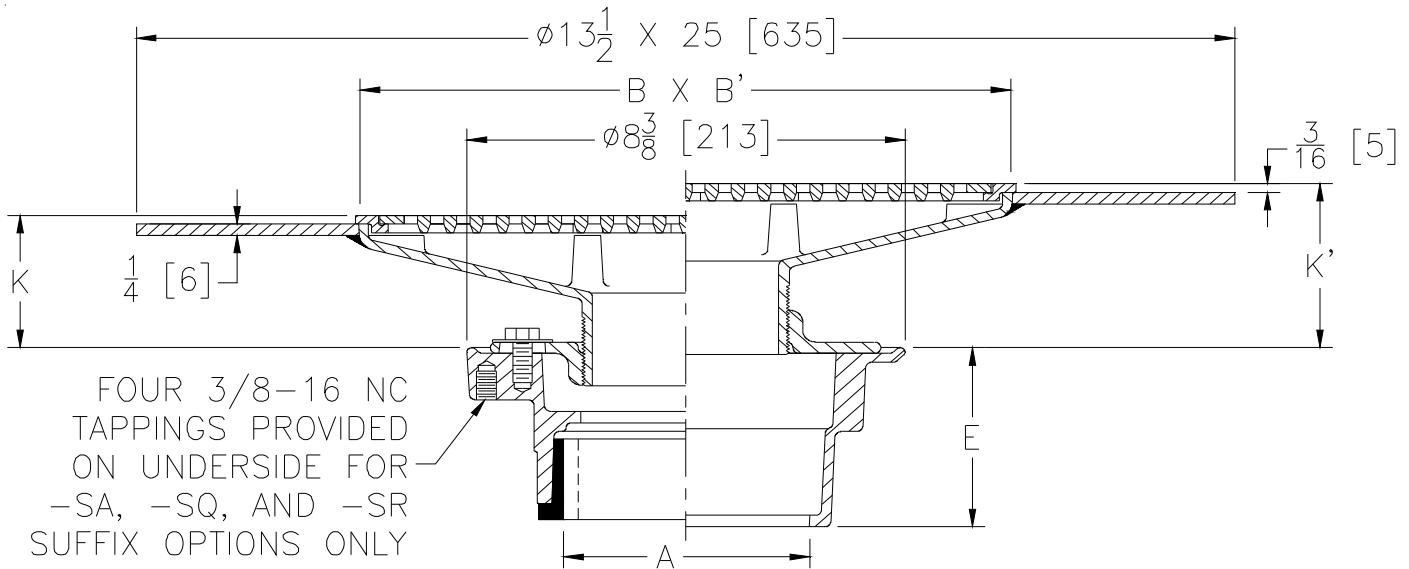

Dimensions In Inches						Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm ²]
A - Pipe Size	B x B' Strainer Size	K		K'			
		Min.	Max.	Min.	Max.		
3-4 [76-102]	5 x 17 [127 x 432]	2-1/4 [57]	3-5/16 [84]	2-13/16 [71]	4 [102]	40 [18]	29 [187]

ENGINEERING SPECIFICATION: ZURNZN415J-76

Floor and shower drain, Dura-Coated cast iron body with DEX-O-TEX flange, bottom outlet, combination invertible membrane clamp and adjustable collar with seepage slots and "TYPE J" polished, nickel bronze rectangular, light-duty, heel-proof strainer.

OPTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify size/type) OUTLET	'E' BODY HT. DIM.
3, 4 [76, 102]	_____ IC Inside Caulk	3-7/8 [98]
3, 4 [76, 102]	_____ IG Inside Gasket	3-7/8 [98]
3 [76]	_____ IP Threaded	2-5/8 [67]
4 [102]	_____ IP Threaded	2-7/8 [73]
3, 4 [76, 102]	_____ NH No-Hub	3-7/8 [98]
3, 4 [76, 102]	_____ NL Neo-Loc	3-3/4 [95]

PREFIXES

- _____ ZB D.C.C.I. Body Assembly w/ Polished Bronze Top
- _____ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top*

SUFFIXES

- | | |
|--|--|
| _____ -AR Acid Resisting Epoxy Coated Cast Iron | _____ -V Backwater Valve |
| _____ -G Galvanized Cast Iron | _____ -VP Vandal-Proof Secured Top |
| _____ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19]) | _____ -Y Sediment Bucket |
| _____ -SA Stabilizer Assembly (See Z1035) | _____ -18 Leveling Ring (See Z400-18) |
| _____ -SQ Stabilizer Q-Deck (See Z1035-Q) | _____ -90 90° Threaded Side Outlet Body Assembly (3 [76] Only) |
| _____ -SR Stabilizer Ring | |
| _____ -TC Neo-Loc Test Cap Gasket (NL Bottom Outlet Only) | |
| _____ -U 1 - 3 [25 - 76] High Extension Adapter | |

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. -	DATE: 06/28/12	C.N. NO. 124505
DWG. NO. 309929	PRODUCT NO. Z415J-76	