




Z1186-123
OIL INTERCEPTOR
W/ INTEGRAL STORAGE TANK

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

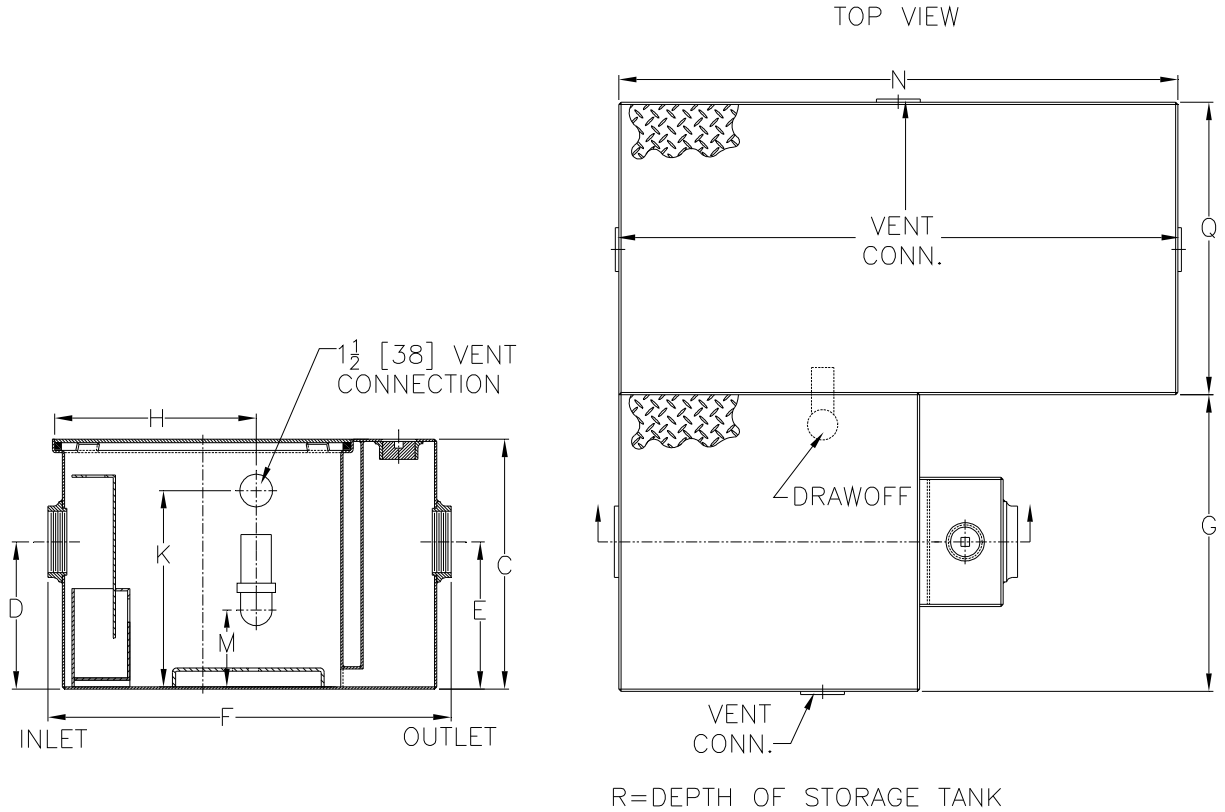

SIZE	Inlet/Outlet Size**	Flow Rate G.P.M.	Water Capacity Gal.[L]	Approx. Wt. Lbs.[kg]	Oil Storage Tank Capacity Gal.[L]
300	2 [51]	10 [38]	7 [26]	280 [127]	50 [189]

Dimensions in inches										
SIZE	C	D/E	F	G	H	K	M	N	Q	R
300	13 5/8 [346]	8 1/8 [206]	22 5/8 [575]	14 [356]	11 5/8 [295]	10 5/8 [270]	4 5/16 [110]	30 [762]	16 1/2 [381]	37 1/2 [914]

ENGINEERING SPECIFICATION: ZURN Z1186-123 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, oil drawoff, vent connections, secured gasketed non-skid cover, complete with flow control fitting and integral storage tank. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

_____ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

_____ -HD Heavy duty traffic cover rated at 10,000 lbs. maximum safe live load.

_____ -STR Storage tank on right when facing the inlet.

** Inlet and outlet size shown indicate standard operating size and flow control setting. Size #300 will have 3 [76] connections reduced to 2 [51] as standard.

REV.	DATE: 2/15/06	C.N. NO. 94741
DWG NO. P-15250	PRODUCT NO. Z1186-123	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED