




Z1171-88

LOW PROFILE GREASE INTERCEPTOR W/ 6 [152] BOLT-ON EXTENSION

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

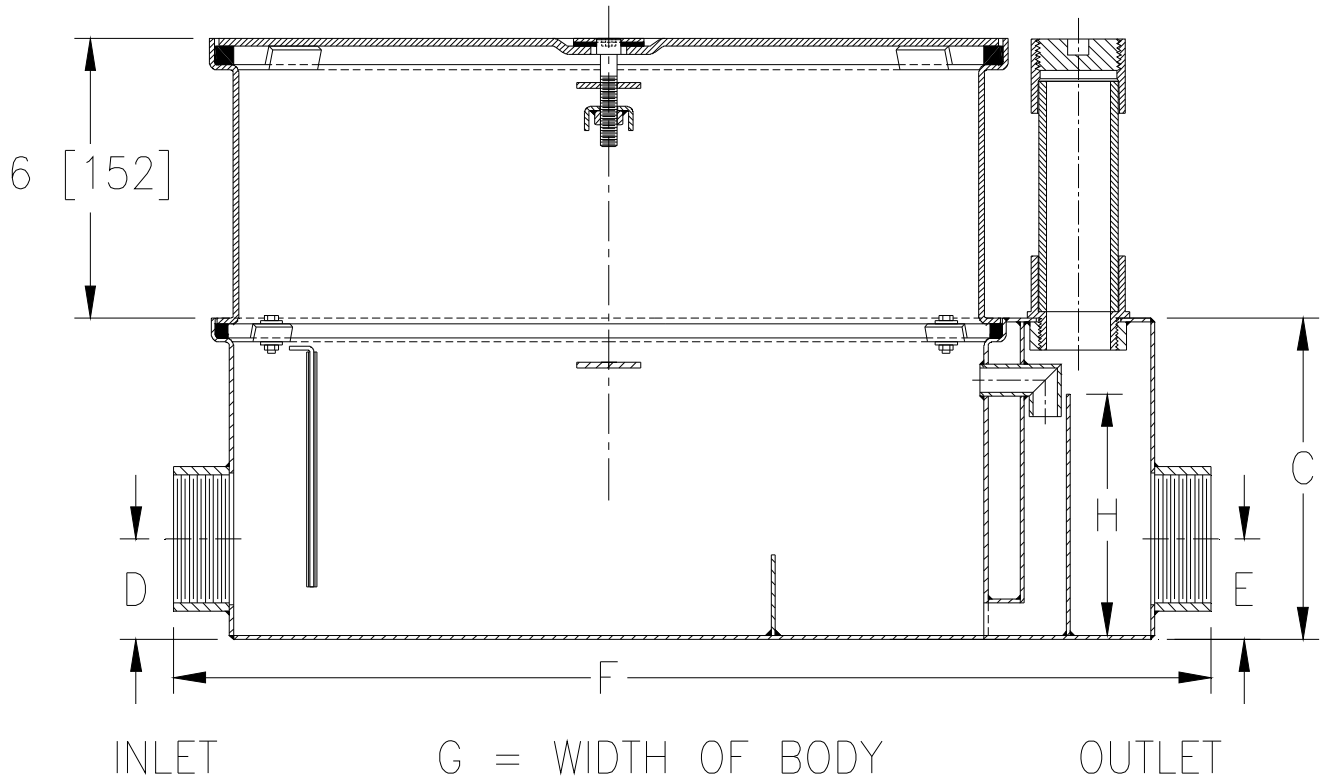

Size	Inlet/ Outlet Size*	Flow Rate G.P.M. [L]	Capacity		Approx. Wt. Lbs. [kg]	Dimensions in Inches				
			Water Gal. [L]	Grease Lbs. [kg]		C	D/E	F	G	H
500	3* [76]	20 [76]	15 [60]	40 [18]	131 [59]	10 [254]	3-1/8 [79]	32-3/8 [822]	20-3/4 [527]	6-3/4 [171]
700		35 [132]	30 [113]	70 [32]	211 [96]	10-3/4 [273]	3-5/16 [84]	43-1/2 [1105]	29 [737]	7 [178]
800		50 [189]	45 [170]	100 [45]	253 [115]	16 [406]	10 [254]	49-7/8 [1267]	29 [737]	10 [254]

ENGINEERING SPECIFICATION: ZURNZ1171-88

Acid Resistant Coated interior and exterior fabricated steel low type grease interceptor, PDI rated at ____ GPM and ____ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug, removable pressure equalizing/flow diffusing inlet baffle, fixed bottom outlet baffle, Acid Resistant Coated interior and exterior 6 [152] Bolt-on Extension and visible double wall trap seal. Gasketed non-skid secured cover, complete with center tie down assembly and Z1108 flow control fitting. Regularly furnished with 3 [76] low inlet and outlet.*

OPTIONS (Check/specify appropriate options)

PREFIXES

- ___ Z Acid Resistant Coated Fabricated Steel*
- ___ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- ___ -L Angle Type (Z1108-L) Flow Control Device with Plunger.
- ___ -PW Plug Wrench

Caution: Installations using indirect piping to unit could result in standing water in floor sink or flooding if line blockage occurs.

* Regularly furnished unless otherwise specified.