




Z-100-111 15" DIAMETER MAIN ROOF DRAIN

TAG _____

Dimensions Subject to Manufacturing Tolerances

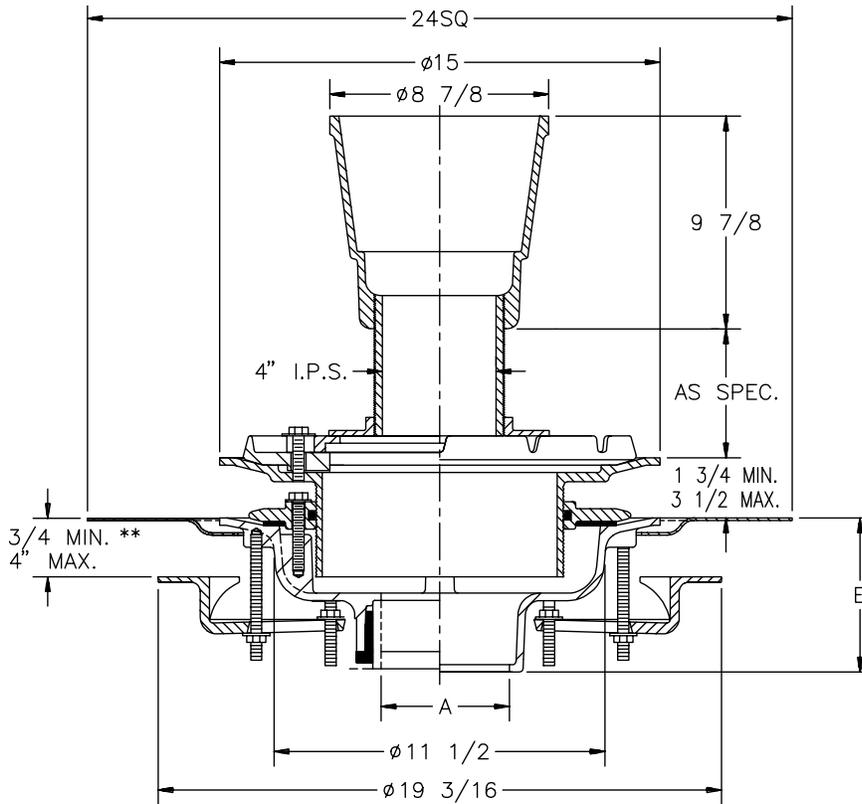

A- Pipe Size In.	Approx. Wt. Lbs.
2-3-4	48
6	49

ENGINEERING SPECIFICATION: ZURN Z-100-111 15" Diameter roof drain. Dura-Coated cast iron body with combination membrane flashing clamp gravel guard, adjustable extension, secondary clamping collar with o-ring, adjustable stand pipe, roof sump receiver, underdeck clamp and indirect waste funnel.

OPTIONS (Check/specify appropriate options)

OUTLET (Specify type)

- _____ **IC** Inside Caulk
- _____ **IG** Inside Caulk w/Sealtrol Gskt.
- _____ **IP** Threaded
- _____ **NH** No-Hub
- _____ **NL** Neo-Loc

PIPE SIZE (Specify size)

- _____ 2", thru 6", 8", 10"
- _____ 2", thru 4", 6"
- _____ 2", thru 6", 8", 10"
- _____ 2", thru 6", 8", 10"
- _____ 2", thru 4"

'E' BODY HT. DIMENSION

- 5-1/4"
- 5-1/4"
- 3-3/4"
- 5-1/4"
- 4-5/8"

PREFIXES

- _____ **Z-** D.C.C.I. Body
- _____ **ZA-** D.C.C.I. Body
- _____ **ZC-** D.C.C.I. Body
- _____ **ZRB-** D.C.C.I. Body

** With standard studs, longer studs available upon request.

SUFFIXES

- _____ **-AC** Angular Underdeck Clamp
- _____ **-E** Static Extension 1" thru 4" (Specify Height)
- _____ **-G** Galvanized Cast Iron
- _____ **-S** Secondary Clamp Collar
- _____ **-XJ** Vertical Expansion Joint (See Z-190)
- _____ **-90** 90° Threaded Side Outlet Body (previously Z-115)

REV.	DATE: 3/26/93	C.N. NO. 68973
DWG. NO. P-13811 PRODUCT NO. Z-100-111		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED